




Model
BPS-015

Low Cost DC Power Supply

1.5A, Fuse Protection

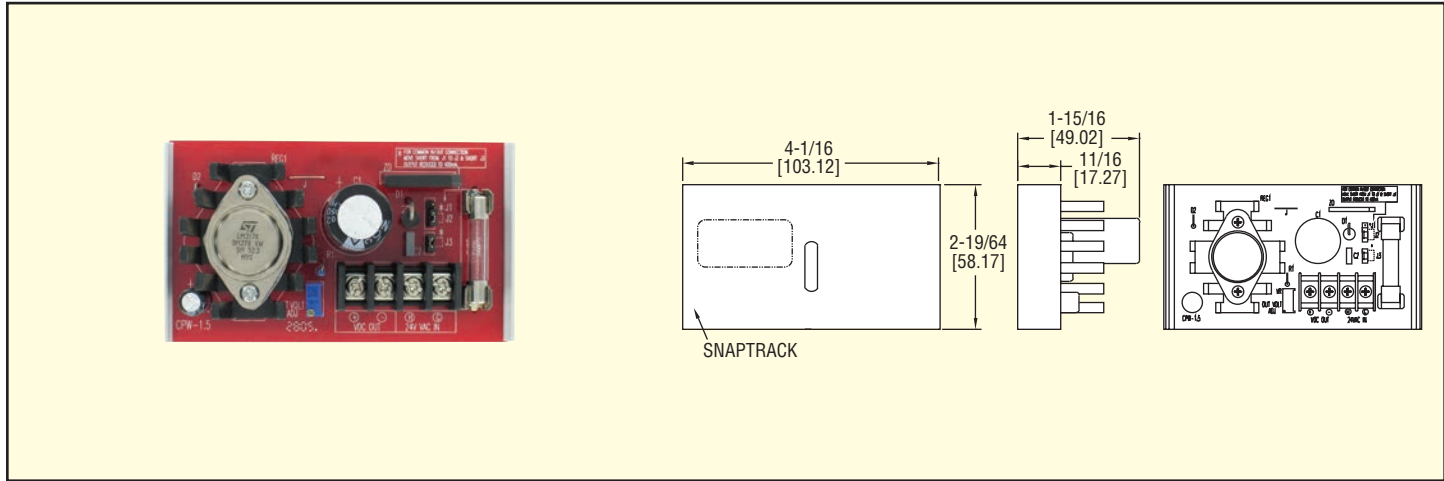

The Model BPS Building Automation Power Supply is used to convert 24 VAC to a regulated DC power source for transmitters with 4 to 20 mA outputs. The output voltage can be field adjusted from 1.5V to 27V using a potentiometer. The 3A fuse protects the power supply from over-current conditions. The snap-on bracket can be quickly surface mounted to any flat surface.

Model BPS-015, Power Supply

SPECIFICATIONS

Input: 24 VAC/VDC 50/60 Hz.

Output: 24 VDC (full wave rectified and regulated) adjustable 1.5 to 27 VDC.

Maximum Current Output: 1.5A (de-rated to 400 mA for non-isolated circuits).

Temperature Limits: 32 to 130°F (0 to 55°C).

Humidity Limits: 95% (non-condensing).

Weight: 0.4 lb.