





 Series  
CCT40/50

# Current Transformers

Solid or Split Core, Field Selectable Range

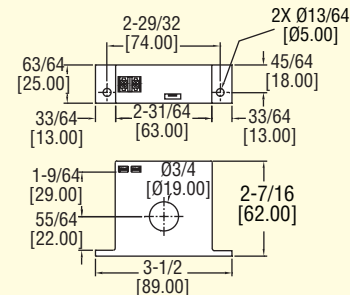

SOLID MODELS



SPLIT MODELS

The Series CCT40/50 Current Transformers are a low cost alternative for measuring power and monitoring the operation of fans, pumps, or other equipment. For use on existing installations, split core models can be installed without disconnecting cables. Each model offers three jumper selectable ranges and a choice of three different outputs.

## SPECIFICATIONS

**Amperage Range:** Field selectable; up to 200 A (depending on model).

**Output:** 0 to 5 V, 0 to 10 V, or 4 to 20 mA (depending on model).

**Power Requirements:** Self powered or 15 to 42 VDC loop powered (depending on model).

**Accuracy:** 1%.

**Temperature Limits:** -22 to 158°F (-30 to 70°C).

**Humidity Limits:** 0 to 95% (non-condensing).

**Response Time:** 250 ms to 90%.

**Isolation Voltage:** 2000 V.

**Frequency:** 10 to 400 Hz.

**Enclosure Rating:** UL, 94 V-O flammability rated, ABS plastic housing.

**Approvals:** CE, UL.

Model	Range	Output	Power Requirements	Case
CCT40-202	10/20/50 A	0 to 5 V	Self Powered	Solid core
CCT50-202	100/150/200 A	0 to 5 V	Self Powered	Solid core
CCT40-102	10/20/50 A	0 to 5 V	Self Powered	Split core
CCT50-102	100/150/200 A	0 to 5 V	Self Powered	Split core
CCT40-203	10/20/50 A	0 to 10 V	Self Powered	Solid core
CCT50-203	100/150/200 A	0 to 10 V	Self Powered	Solid core
CCT40-200	10/20/50 A	4 to 20 mA	15 to 42 VDC, Loop Powered	Solid core
CCT50-200	100/150/200 A	4 to 20 mA	15 to 42 VDC, Loop Powered	Solid core
CCT40-100	10/20/50 A	4 to 20 mA	15 to 42 VDC, Loop Powered	Split core
CCT50-100	100/150/200 A	4 to 20 mA	15 to 42 VDC, Loop Powered	Split core