




Series
SCD

DIN Rail Temperature/ Process Controller

Universal Inputs, Up to 8 PID Loops, Modbus® Communications

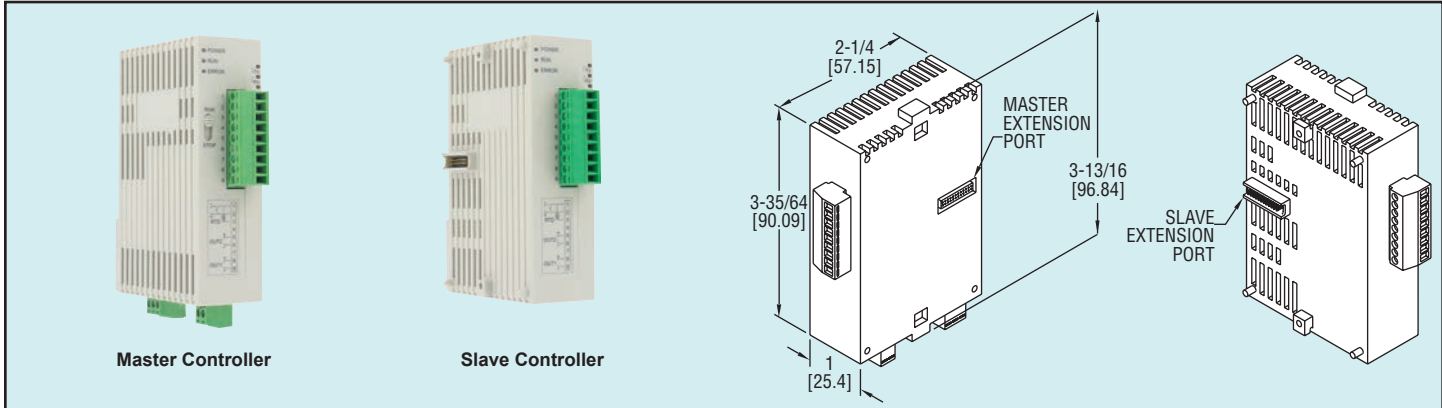

The DIN Rail Mount Series SCD offers multiple PID loops in a compact size. Each SCD-1000 master controller can be combined with up to seven SCD-2000 slave controllers without any wires. Each controller has one universal input, one relay output and one user selected output. The outputs can be used for a dual loop to control heating and cooling or a single loop with an alarm. These controllers support up to 64 ramp/soak actions. The SCD series controllers are programmed using an user-friendly software program via the RS-485 Modbus® communications.

Model	Controller	Output 1	Output 2
SCD-1023	Master	Voltage Pulse	Relay
SCD-1033	Master	Relay	Relay
SCD-1053	Master	Current	Relay
SCD-1063	Master	Linear Voltage	Relay
SCD-2023	Slave	Voltage Pulse	Relay
SCD-2033	Slave	Relay	Relay
SCD-2053	Slave	Current	Relay
SCD-2063	Slave	Linear Voltage	Relay

*DC current input requires 250 Ohm Precision Resistor

SPECIFICATIONS

Inputs: Thermocouple, RTD, DC linear voltage, and DC currents.*
Supply Voltage: 24 VDC.
Power Consumption: 3 W.
Operating Temperature: 32 to 122°F (0 to 50°C).
Memory Backup: Non-volatile.

ACCESSORIES

SCD-PS, 100 to 240 VAC/VDC to 24 VDC Power Supply
SCD-SW, Configuration Software
A-277, 250 Ohm Precision Resistor
MN-1, Mini-Node™ USB/RS-485 converter
A-600, R/C snubber

Control Output Ratings: Relay: 3A @ 250 VAC resistive; Voltage pulse: 12 VDC, max. output current: 40 mA; Current: 4 to 20 mA output; Linear voltage: 0 to 10 VDC.
Communication: RS-485 Modbus® A-5-11/RTU communication protocol.
Weight: 2.7 oz (76.5 g).
Agency Approvals: CE, RoHS, cUL, UL.