

PRESSURE TRANSMITTER


±0.25% FS Accuracy, 4-20 mA Signal, Ranges to 1000 psi



Cable Anchor



Conduit Version

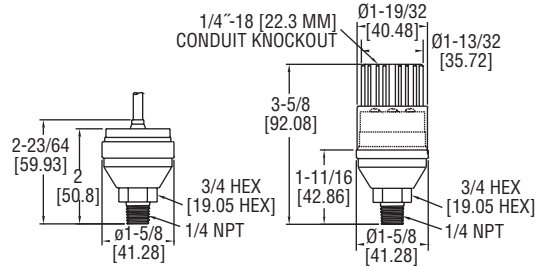

Cable Anchor

Conduit Version

The low cost **SERIES 673** Pressure Transmitter is a fixed range transmitter designed for harsh environments and suitable for high shock and vibration applications. Constructed of stainless steel, the Series 673 provides a 4 to 20 mA output signal with 0.25% accuracy. Use the Series 673 in industrial OEM equipment, hydraulic systems, HVAC equipment, industrial engines and compressor control.

FEATURES/BENEFITS

- High-shock and vibration resistant insures stability in controlling pressure for process applications

APPLICATIONS

- OEM
- Industrial engines
- Hydraulic systems
- Compressors
- HVAC equipment

MODEL CHART					
Model	Range psi	Price	Model	Range psi	Price
673-1	0 to 1	\$203.00 ^(B)	673-1C	0 to 1	\$217.00 ^(B)
673-2	0 to 2	203.00 ^(B)	673-2C	0 to 2	217.00 ^(B)
673-3	0 to 5	203.00 ^(B)	673-3C	0 to 5	217.00 ^(B)
673-4	0 to 10	203.00 ^(B)	673-4C	0 to 10	217.00 ^(B)
673-5	0 to 25	203.00 ^(B)	673-5C	0 to 25	217.00 ^(B)
673-6	0 to 50	203.00 ^(B)	673-6C	0 to 50	217.00 ^(B)
673-7	0 to 100	203.00 ^(B)	673-7C	0 to 100	217.00 ^(B)
673-8	0 to 200	203.00 ^(B)	673-8C	0 to 200	217.00 ^(B)
673-9	0 to 500	203.00 ^(B)	673-9C	0 to 500	217.00 ^(B)
673-10	0 to 1000	203.00 ^(B)	673-10C	0 to 1000	217.00 ^(B)
673-14	-14.7 to 100	270.00 ^(B)	673-14C	-14.7 to 100	308.00 ^(B)

*The model numbers followed by a "C" represent the conduit version, which is hand tightened to ensure proper electrical seal.

^(B) Items are subject to Schedule B discounts.

SPECIFICATIONS	
Service: Liquid, gas, or vapor.	Output: 4 to 20 mA, 2-wire.
Wetted Materials: 17-4 PH SS.	Zero & Span Adjustment: Fixed.
Accuracy: ±0.25% FS (RSS), (includes non-linearity, hysteresis and non-repeatability).	Response Time: 5 ms.
Temperature Limits: -40 to 185°F (-40 to 85°C).	Loop Resistance: 0 to 800 Ω.
Compensated Temperature Limits: -40 to 176°F (-40 to 80°C).	Stability: 0.5% FS/year.
Pressure Limits: 2 x max range.	Shock: 200 g.
Thermal Errors: Zero: ±3.6% FS/100°F(100°C); Span: ±2.7% FS/100°F(100°C).	Vibration: 20 g.
Power Requirements: 9 to 30 VDC.	Electrical Connections: 2 ft (61 cm) multiconductor cable.
	Conduit Connection: 1/4"-18 (22.3 mm) knockout.
	Enclosure: Stainless steel and Valox.
	Weight: 2.3 oz (65 g).
	Agency Approvals: CE.

OPTION		
Use order code:	Description	Price
NISTCAL-PT1	NIST traceable calibration certificate	\$139.00