


**Dwyer**

SERIES GG

# GAGE GUARD

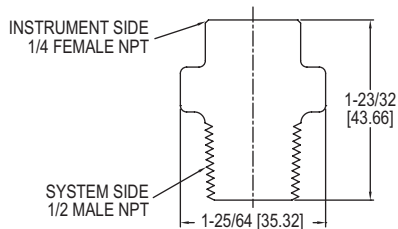

Protecting pressure or vacuum instruments from clogging, corrosion, or damage, the **SERIES GG** Gage Guard provides a protective barrier between the process fluid and the instrument. The hermetically-sealed uni-body protects from the possibility of leaking. Glass-filled Polypropylene housing is suitable for most inorganic chemicals and temperatures up to 185°F (85°C). A fluid fill station is recommended for proper installation.

## SPECIFICATIONS

**Maximum Pressure:** Liquids: 160 psi (11 bar) @ 70 to 185°F (21 to 85°C); Gases: 100 psi (6.9 bar) @ 70 to 100°F (21 to 38°C) and 30 psi (2.1 bar) @ 100 to 185°F (38 to 85°C).

**Accuracy:** ±4%.

**Maximum Temperature:** 185°F (85°C).

**Wetted Parts:** Glass-filled polypropylene housing, Buna-N or fluoroelastomer diaphragm.

**Dimensions:** 1/4" female NPT instrument side; 1/2" male NPT system side; 1-3/8" (35 mm) diameter.

## MODEL CHART

Model	Description	Price
GG1	Buna-N diaphragm	\$75.50 <sup>(B)</sup>
GG2	Fluoroelastomer diaphragm	85.50 <sup>(B)</sup>

<sup>(B)</sup> Items are subject to Schedule B discounts.