
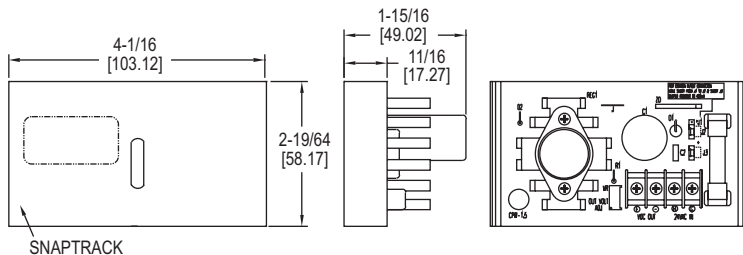


MODEL BPS-015

LOW COST DC POWER SUPPLY

Regulated 1.5 A, 3 A Fuse Protection



The **Model BPS-015 Low Cost DS Power Supply** is used to convert 24 VAC to a regulated DC power source for transmitters with 4 to 20 mA outputs. The output voltage can be field adjusted from 1.5 V to 27 V using a potentiometer. The 3 A fuse protects the power supply from over-current conditions. The snap-on bracket can be quickly surface mounted to any flat surface.

FEATURES/BENEFITS

- Snap track design allowing for easy panel installation
- Regulated 1.5 Amp

APPLICATIONS

- BAS
- HVAC

SPECIFICATIONS

Input: 24 VAC/VDC 50/60 Hz.

Output: 24 VDC (full wave rectified and regulated) adjustable 1.5 to 27 VDC.

Maximum Current Output: 1.5 A (derated to 400 mA for non-isolated circuits).

Temperature Limits: 32 to 130°F (0 to 55°C).

Humidity Limits: 95% (non-condensing).

Weight: 0.4 lb.

MODEL CHART

Model	Description
BPS-015	Power supply