




SERIES MTL5541

GALVANIC BARRIER

Intrinsically Safe Isolators for Hazardous Locations

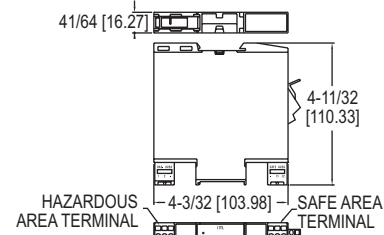

The Series MTL5541 Galvanic Barrier provides intrinsically safe isolation for communication with Dwyer® transmitters approved for use in hazardous areas. This galvanic barrier eliminates the need for a high integrity earth ground required when using shunt type diode type safety barriers. DIN rail mounting and plug-in signal and power connectors simplify installation and maintenance.

FEATURES/BENEFITS

- Designed to mount on most standard DIN rails
- Approved for use in hazardous areas

APPLICATIONS

- Electrically isolates pressure and level transmitters from unregulated circuits for intrinsically safe applications

MODEL CHART	
Model	Description
MTL5541	Galvanic barrier

ACCESSORIES	
Model	Description
A-360	Aluminum DIN rail 1 m

COMPATIBLE MODELS: 608, SBLTX, PBLTX, IS626		
Model	Approval	Dwyer Series
MTL 5541	UL for class I; div. 1 groups A, B, C, D class II div. 1 groups E, F, G class III div. 1	IS626, SBLTX, PBLTX
MTL 5541	FM for class I, II, III; div. 1 groups A, B, C, D, E, F, G	608

SPECIFICATIONS	
<p>Hazardous Area Input: Signal range: 0 to 24 mA (including over-range); Transmitter voltage: 16.5 V at 20 mA.</p> <p>Safe Area Output: Signal range: 4 to 20 mA; Under/over-range: 0 to 24 mA; Load resistance: 0 to 360Ω @ 24 mA, or 0 to 450Ω @ 20 mA; Current sink: 600Ω max.; Maximum Voltage Source: 24 VDC; Output resistance: > 1 MΩ.</p> <p>Power Requirement: 20 to 35 VDC</p> <p>Response Time: Settles to within 10% of final value within 50 μs.</p> <p>Current Consumption (20 mA signal): 51 mA @ 24V.</p> <p>Maximum Power Dissipation (20 mA signal): 0.7 W @ 24 VDC, 1.0 W @ 24 VDC.</p>	<p>Isolation: 250 V RMS, tested at 1500 V RMS minimum, between safe- and hazardous-area terminals; 50 V between safe-area circuits and power supply.</p> <p>Transfer Accuracy at 68°F (20°C): Better than 15 μA.</p> <p>LED Indicator: Green: Power Indication.</p> <p>Temperature Limits: Operating: -6 to 140°F (-20 to 60°C); Storage: -40 to 176°F (-40 to 80°C).</p> <p>Temperature Drift: < 0.8μA°C.</p> <p>Humidity: 5 to 95% RH.</p> <p>Mounting: T-section 35mm DIN rail (7.5 or 15mm) to EN 50022.</p> <p>Terminals: Accommodate up to 2.5 mm² stranded or single-core.</p> <p>Safety Description: Vo= 28 V, Io= 93 mA, Po= 651mW, Um= 253 RMS or DC.</p> <p>Weight: 150 g.</p> <p>Agency Approvals: See table.</p>

Certifying Authority	Standard	Approved For	Certificate/File no.
FM (USA)	FM3600, FM3610, FM3810	Associated Apparatus providing intrinsically safe circuits for Class I, II, III, Division 1, Groups A, B, C, D, E, F, and G when installed per the control drawing SCI-1028; Non-incendive for Class I, Division 2, Groups A, B, C, and D T4; Intrinsic safety for AEx [ia] IIC when installed per the control drawing SCI-1028; Non sparking for Class I, Zone 2, AExnA IIC T4 Gc hazardous (classified) locations with an ambient temperature rating of -20OC to +60OC	3025815
Canada (CSA)	CSA-C22.2 No. 157-M1992, CSA-C22.2 No. 213-M1987	Associated Apparatus for use in Unclassified Locations or Class I, Division 2, Groups A, B, C, D	E120058
UL	UL61010-1 Edition 3 UL913 Edition 8 UL60079-0 Edition 6 UL60079-11 Edition 6	Class I, Division 2, Groups A, B, C, D; Class I, Zone 2, Group IIC; Ex nA [ia] IIC; Ex nC [ia] IIC	LR 36637
CSA	C22.2 No. 142-M1987 C22.2 No. 157-M1992 C22.2 No. 213-M1987 CAN/CSA E60079-0:07 CAN/CSA E60079-11:02 CAN/CSA E60079-15:02	Ex nA IIC T4 Gc	Baseefa07ATEX0213 MTL08ATEX5541X BAS01ATEX7217
ATEX	EN 60079-0:2012 EN 60079-15:2010	EX nA IIC T4 Gc	IECEx BAS 15.0119X
IECEx (Type 'n')	IEC 60079-0:2011 Edition 6 IEC 60079-15:2010 Edition 4	[Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I	IECEx BAS 07.0069
IECEx (Intrinsic Safety)	IEC 60079-0:2011 Edition 4 IEC 60079-11:2011 Edition 6	[Ex ia] I/II/III, IECEx ITA 08.0009X	IECEx ITA 08.0009X