



SERIES SSCS

SURE-SET CURRENT SWITCHES

Split Core, Adjustable Set Point

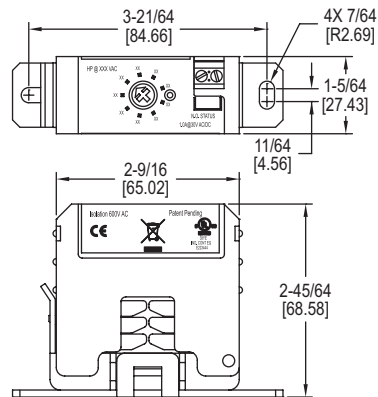

The **Series SSCS Sure-Set Current Switches** provide a unique approach to calibration and installing current sensors in a low cost, fast, and accurate design. Selecting the set point has never been easier, with each model having 9 pre-configured adjustable HP set points. This feature eliminates the need to work within a live enclosure, reducing the risk of arc flash on installation.

FEATURES/BENEFITS

- Models for 230 VAC or 480 VAC applications
- Low and high motor HP ranges available
- 9 pre-set HP set points for faster installation

APPLICATIONS

- BAS
- HVAC
- Industrial motors

MODEL CHART			
Model	Case	Motor HP Range	Motor Application
SSCS-211100-230	Split	1, 2, 3, 5, 7.5, 10, 15, 20, 25	230 VAC
SSCS-211200-480	Split	2, 3, 5, 7.5, 10, 15, 20, 25, 30	480 VAC
SSCS-211500-230	Split	5, 7.5, 10, 15, 20, 25, 30, 40, 50	230 VAC
SSCS-211150-480	Split	15, 20, 25, 30, 40, 50, 60, 75, 100	480 VAC

SPECIFICATIONS

- Output:** Isolated, NO.
- Power Requirements:** None, self-powered.
- Temperature Limits:** 5 to 140°F (-15 to 60°C).
- Humidity Limits:** 0 to 95%, non-condensing.
- Isolation Voltage:** 600 VAC RMS.
- Frequency:** 50/60 Hz.
- Enclosure Rating:** UL 94 V-0 flammability rated, ABS plastic housing.
- Agency Approvals:** CE, cULus.

ACCESSORIES

Model	Description
SCT-RLY-12	12 VAC trigger voltage relay module
SCT-RLY-24	24 VAC trigger voltage relay module