


Dwyer

SERIES 123 & 125 | MERCROID® BY DWYER



BOILER WATER LEVEL CONTROL

Heavy Duty, Cast Iron Chamber

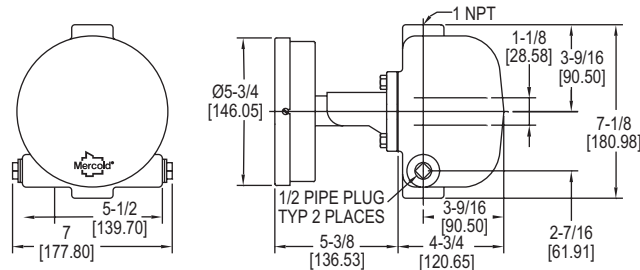

The **Series 123 & 125 Boiler Water Level Control** is designed for boiler applications, the Model 123 is primarily used for low water cut-off or feed-water control. The 125 offers the same long lasting service with a direct action mercury switch movement that provides a close deadband where needed.

FEATURES/BENEFITS

- Special snap action switch mechanism options eliminates frequent operation due to surging water level
- Transparent cover provides convenient visible operation of the switch
- Flanged chamber for easy clean out and replacement of float or switch mechanism without removing the unit from piping

APPLICATIONS

- Boiler low water cut-off
- Boiler feed-water control
- Condensate tanks
- Deaerators

MODEL CHART

Model	Switch Type	Price
123-153	SPDT mercury	\$340.00
123-7000-153	SPDT snap	340.00

SPECIFICATIONS

Service: Compatible liquids. Cast iron is not for use with lethal or flammable substances either liquid or gaseous.

Wetted Materials: Body: Cast iron; Float: 304 SS; Trim and packing gland: Brass; Packing: Carbon; Body gasket: Carbon.

Temperature Limit: Ambient Temperature: 212°F (100°C); Process Temperature: 365°F (185°C).

Pressure Limit: 150 psig (10.34 bar).

Enclosure Rating: General purpose. Optional weatherproof.

Switch Type: SPDT snap switch or mercury switch. Optional DPDT or two stage.

Electrical Rating: Snap switch: 12 A @ 120 VAC, 5 A @ 240 VAC, 0.5 A @ 125 VDC resistive, 0.25 A @ 250 VDC resistive; Mercury switch: 4 A @ 120 VAC/DC, 2 A @ 240 VAC/DC.

Electrical Connections: Screw terminal. Conduit Connection: 7/8" (22.23 mm) hole for 1/2" (12.7 mm) conduit.

Process Connections: 1" female NPT.

Mounting Orientation: Vertical.

Deadband: Approximately 1-1/2" (38.1 mm).

Specific Gravity: 0.88 min.

Options: Manual reset.

Weight: 20 lb (9.1 kg).

Agency Approvals: CSA, UL. (Snap switch is not rated).