



QUICK CONNECT PNEUMATIC FITTINGS

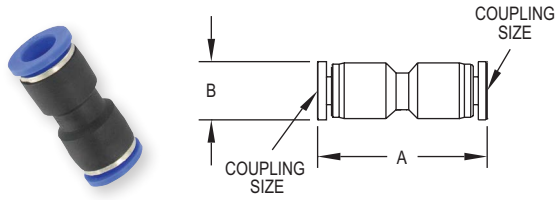


| Model | A | B | Model | A | B |
|----------|-------------|-------------|----------|-------------|-------------|
| A-3025-0 | 1.33 [33.8] | 0.45 [11.5] | A-3029-0 | 1.33 [33.8] | 0.45 [11.5] |
| A-3025-1 | 1.38 [35] | 0.55 [14] | A-3029-1 | 1.38 [35] | 0.55 [14] |
| A-3025-2 | 1.53 [38.9] | 0.57 [14.6] | A-3029-2 | 1.53 [38.9] | 0.57 [14.6] |
| A-3025-3 | 1.62 [41.1] | 0.69 [17.6] | A-3029-3 | 1.62 [41.1] | 0.69 [17.6] |

A-3025 Fittings: Quick Coupling Straight
A-3029 Fittings: Quick Coupling Straight Adapter

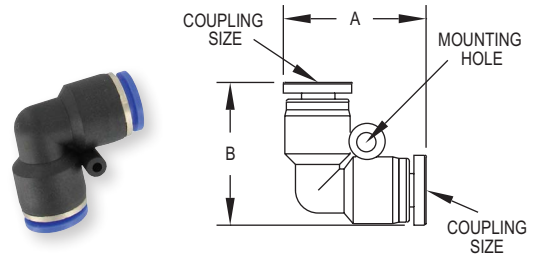


| Model | A | B |
|----------|-------------|-------------|
| A-3026-0 | 0.93 [23.7] | 0.93 [23.7] |
| A-3026-1 | 1.09 [27.8] | 1.09 [27.8] |
| A-3026-2 | 1.20 [30.6] | 1.20 [30.6] |
| A-3026-3 | 1.33 [33.8] | 1.33 [33.8] |

A-3026 Fittings: Quick Coupling 90 Degree

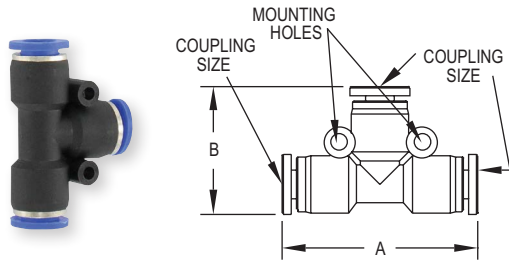

| Model | A | B | Model | A | B |
|----------|-------------|-------------|----------|-------------|-------------|
| A-3027-0 | 1.49 [37.8] | 0.97 [23.7] | A-3030-0 | 1.49 [37.8] | 0.97 [23.7] |
| A-3027-1 | 1.64 [41.6] | 1.09 [27.8] | A-3030-1 | 1.64 [41.6] | 1.09 [27.8] |
| A-3027-2 | 1.83 [46.6] | 1.20 [30.6] | A-3030-2 | 1.83 [46.6] | 1.20 [30.6] |
| A-3027-3 | 1.98 [50.4] | 1.33 [33.8] | A-3030-3 | 1.98 [50.4] | 1.33 [33.8] |

A-3027 Fittings: 3 Way Quick Coupling
A-3030 Fittings: 3 Way Quick Coupling Adapter

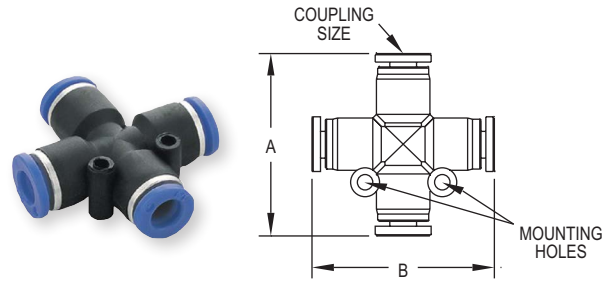

| Model | A | B |
|----------|-------------|-------------|
| A-3028-0 | 1.49 [37.8] | 1.49 [37.8] |
| A-3028-1 | 1.64 [41.6] | 1.64 [41.6] |
| A-3028-2 | 1.83 [46.6] | 1.83 [46.6] |
| A-3028-3 | 1.98 [50.4] | 1.98 [50.4] |

A-3028 Fittings: 4 Way Quick Coupling


| MODEL CHART | | |
|-------------|-----------------------------------|--------|
| Model | Coupling (O.D.) x Coupling (O.D.) | Price |
| A-3025-0 | 3/16" x 3/16" | \$2.50 |
| A-3025-1 | 1/4" x 1/4" | 2.50 |
| A-3025-2 | 5/16" x 5/16" | 3.20 |
| A-3025-3 | 3/8" x 3/8" | 3.30 |
| A-3026-0 | 3/16" x 3/16" | 2.90 |
| A-3026-1 | 1/4" x 1/4" | 2.90 |
| A-3026-2 | 5/16" x 5/16" | 3.40 |
| A-3026-3 | 3/8" x 3/8" | 3.80 |
| A-3029-0 | 1/4" x 3/16" | 3.80 |
| A-3029-1 | 5/16" x 1/4" | 3.80 |
| A-3029-2 | 3/8" x 1/4" | 3.80 |
| A-3029-3 | 3/8" x 5/16" | 4.30 |

| MODEL CHART | | |
|-------------|----------------------|--------|
| Model | Coupling (O.D.) | Price |
| A-3027-0 | 3/16" | \$3.80 |
| A-3027-1 | 1/4" | 3.80 |
| A-3027-2 | 5/16" | 4.50 |
| A-3027-3 | 3/8" | 4.70 |
| A-3028-0 | 3/16" | 5.20 |
| A-3028-1 | 1/4" | 5.20 |
| A-3028-2 | 5/16" | 5.60 |
| A-3028-3 | 3/8" | 5.40 |
| A-3030-0* | 1/4" x 1/4" x 3/16" | 4.70 |
| A-3030-1* | 5/16" x 5/16" x 1/4" | 4.70 |
| A-3030-2* | 3/8" x 3/8" x 1/4" | 5.00 |
| A-3030-3* | 3/8" x 3/8" x 5/16" | 5.00 |

*Please contact factory for metric sizes.


| SPECIFICATIONS |
|---|
| Service: Air (no other gases or liquids). |
| Pressure Limits: -29.5 in Hg (-750 mm Hg) to 150 psi (10.3 bar). |
| Temperature Limits: 32 to 140°F (0 to 60°C). |
| Wetted Materials: Polyurethane, polyethylene and nylon. |
| Weight: 0.4 oz (11 g) to 0.7 oz (19 g). |

QUICK CONNECT PNEUMATIC FITTINGS




| Model | A |
|----------|-------------|
| A-3021-1 | 0.79 [20.3] |
| A-3021-2 | 0.86 [21.8] |
| A-3021-3 | 0.82 [20.9] |
| A-3021-4 | 0.88 [22.4] |
| A-3021-5 | 1.01 [25.7] |
| A-3021-6 | 0.95 [24.2] |

A-3021 Fittings: Quick Coupling to NPT Straight

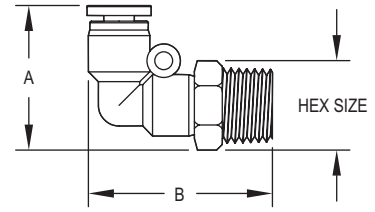


| Model | A | B |
|----------|-------------|-------------|
| A-3022-1 | 0.98 [24.9] | 1.26 [32] |
| A-3022-2 | 1.02 [25.9] | 1.30 [33] |
| A-3022-3 | 1.09 [27.7] | 1.41 [35.8] |
| A-3022-4 | 1.13 [28.8] | 1.45 [36.8] |
| A-3022-5 | 1.23 [31.3] | 1.53 [38.9] |
| A-3022-6 | 1.26 [32] | 1.57 [39.9] |

A-3022 Fittings: Quick Coupling to NPT 90 Degree



| Model | A | B |
|----------|-------------|-------------|
| A-3023-1 | 1.31 [33.3] | 1.49 [37.8] |
| A-3023-2 | 1.35 [34.3] | 1.49 [37.8] |
| A-3023-3 | 1.43 [36.3] | 1.64 [41.6] |
| A-3023-4 | 1.47 [37.3] | 1.64 [41.6] |
| A-3023-5 | 1.53 [38.9] | 1.83 [46.6] |
| A-3023-6 | 1.57 [39.9] | 1.83 [46.6] |

A-3023 Fittings: 3 Way-Quick Coupling by Quick Coupling to NPT

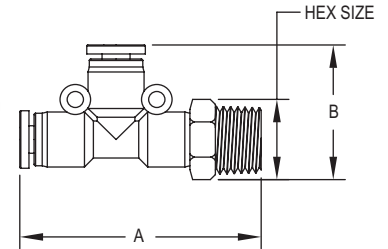

| Model | A | B |
|----------|-------------|-------------|
| A-3024-1 | 1.83 [46.4] | 1.02 [25.9] |
| A-3024-2 | 1.87 [47.4] | 1.06 [26.9] |
| A-3024-3 | 1.97 [50.1] | 1.09 [27.8] |
| A-3024-4 | 2.01 [51.1] | 1.13 [28.8] |
| A-3024-5 | 2.16 [54.9] | 1.23 [31.3] |
| A-3024-6 | 2.20 [55.9] | 1.26 [32] |

A-3024 Fittings: 3 Way-Quick Coupling by NPT to Quick Coupling

| MODEL CHART | | |
|-------------|-----------------------|--------|
| Model | Coupling (O.D.) x NPT | Price |
| A-3021-1 | 1/4" x 1/8" | \$2.00 |
| A-3021-2 | 1/4" x 1/4" | 2.30 |
| A-3021-3 | 5/16" x 1/8" | 2.30 |
| A-3021-4 | 5/16" x 1/4" | 2.30 |
| A-3021-5 | 3/8" x 1/8" | 3.40 |
| A-3021-6 | 3/8" x 1/4" | 3.80 |
| A-3022-1* | 1/4" x 1/8" | 3.20 |
| A-3022-2* | 1/4" x 1/4" | 3.40 |
| A-3022-3* | 5/16" x 1/8" | 3.30 |
| A-3022-4* | 5/16" x 1/4" | 3.50 |
| A-3022-5* | 3/8" x 1/8" | 4.30 |
| A-3022-6* | 3/8" x 1/4" | 4.70 |

*Please contact factory for metric sizes.

| MODEL CHART | | |
|-------------|---|--------|
| Model | Coupling (O.D.) x NPT x Coupling (O.D.) | Price |
| A-3023-1 | 1/4" x 1/4" x 1/8" | \$4.10 |
| A-3023-2 | 1/4" x 1/4" x 1/4" | 4.30 |
| A-3023-3 | 5/16" x 5/16" x 1/8" | 5.40 |
| A-3023-4 | 5/16" x 5/16" x 1/4" | 5.50 |
| A-3023-5 | 3/8" x 3/8" x 1/8" | 5.90 |
| A-3023-6 | 3/8" x 3/8" x 1/4" | 6.10 |
| A-3024-1* | 1/4" x 1/4" x 1/8" | 4.10 |
| A-3024-2* | 1/4" x 1/4" x 1/4" | 4.30 |
| A-3024-3* | 5/16" x 5/16" x 1/8" | 5.40 |
| A-3024-4* | 5/16" x 5/16" x 1/4" | 5.50 |
| A-3024-5* | 3/8" x 3/8" x 1/8" | 5.90 |
| A-3024-6* | 3/8" x 3/8" x 1/4" | 6.10 |

*Please contact factory for metric sizes.

| SPECIFICATIONS |
|---|
| Service: Air (no other gases or liquids). |
| Wetted Materials: Polyurethane, polyethylene and nylon. Note: (A-3021 nickel plated brass). |
| Pressure Limits: -29.5 in Hg (-750 mm Hg) to 150 psi (10.3 bar). |
| Temperature Limits: 32 to 140°F (0 to 60°C). |
| Weight: 0.4 oz (11 g) to 0.7 oz (19 g). |