


DIN RAIL MOUNT TEMPERATURE SWITCH

HACCP Alarm Logging, Intelligent Defrost

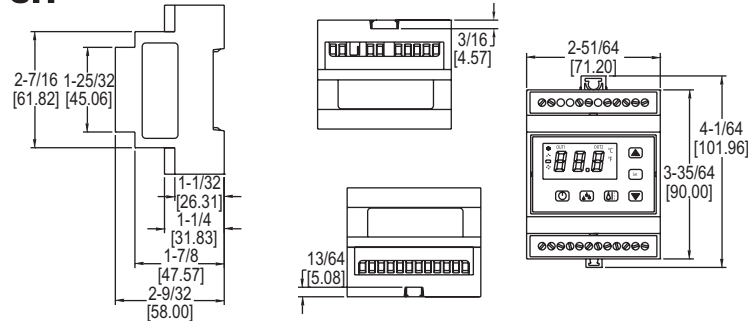

The **Series TSDIN DIN Rail Mount Temperature Switch** is ideally designed to control compressor, defrost, and fan cycles in refrigeration applications. The digital input can be used to remotely trigger a defrost cycle, monitor cooler door status, or act as an external alarm. Three other probe inputs measure cabinet, defrost, and product temperature. Programming performed on the 6 button keypad or with the Model TS2-K configuration key.

FEATURES/BENEFITS

- 3 temperature probe inputs
- Real-time clock used for HACCP logging of temperature limit alarms or loss of power
- Intelligent Defrost parameters manage defrost cycle in order to save energy cost

APPLICATIONS

- Refrigerated cabinets
- Walk in coolers
- Applications requiring defrost cycles

MODEL CHART

Model	Supply Power	# of Outputs	Display Color	Price
TSDIN-013	115 VAC	1, 2, 3	Red	\$108.00
TSDIN-015	115 VAC	1, 2, 3, 4, 5	Red	118.00
TSDIN-023	230 VAC	1, 2, 3	Red	108.00
TSDIN-025	230 VAC	1, 2, 3, 4, 5	Red	118.00
TSDIN-033	12 VAC/VDC	1, 2, 3	Red	108.00
TSDIN-043	24 VAC/VDC	1, 2, 3	Red	108.00
TSDIN-213	115 VAC	1, 2, 3	Blue	108.00
TSDIN-215	115 VAC	1, 2, 3, 4, 5	Blue	118.00
TSDIN-223	230 VAC	1, 2, 3	Blue	108.00
TSDIN-225	230 VAC	1, 2, 3, 4, 5	Blue	118.00
TSDIN-233	12 VAC/VDC	1, 2, 3	Blue	108.00
TSDIN-243	24 VAC/VDC	1, 2, 3	Blue	108.00

SPECIFICATIONS

Probe Range: PTC: -58 to 302°F (-50 to 150°C); NTC: -58 to 230°F (-50 to 110°C).
Input: PTC/NTC.
Output: Output 1: SPST relay rated 16A @ 240 VAC resistive, 10 FLA, 60 LRA, 1HP @ 240 VAC inductive; Output 2: SPDT relay rated 8A @ 240 VAC resistive; Output 3: SPST relay rated 8A @ 240 VAC resistive; Output 4: SPDT relay rated 8A @ 240 VAC resistive; Output 5: SPST relay rated 16A @ 240 VAC resistive, 10 FLA, 60 LRA, 1HP @ 240 VAC inductive.
Control Type: On/off.
Power Requirement: 115 VAC, 230 VAC, 12 VAC/VDC, 24 VAC/VDC (±10% depending on model).
Power Consumption: 6 VA.
Accuracy: Better than 1% of full-scale.
Display: 3-digits plus sign.
Resolution: 0.1°.
Memory Backup: Non-volatile memory.
Temperature Limits: Operating: 32 to 131°F (0 to 55°C); Storage: -4 to 176°F (-20 to 80°C).
Weight: 10.8 oz (306 g).
Agency Approvals: CE, cURus.

ACCESSORIES

See page reference 1 below.

1 Digital Temperature Switch Probes and Accessories: See page 144 (Series TS-Probes)