


100 MM VANE THERMO-ANEMOMETER PROBE

Wireless, Measures Velocity, Flow, Humidity, and Temperature

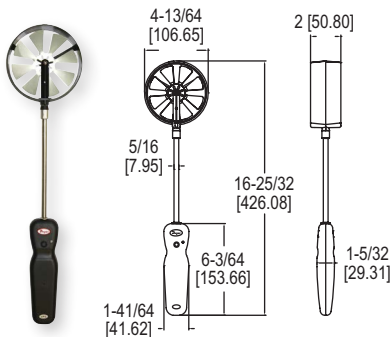

FEATURES/BENEFITS

- Allows for one handed operation for ladder use safety
- Stable 50' (15 m) wireless range

APPLICATIONS

- Building Commissioning
- Building HVAC Test and Balance

SPECIFICATIONS

Service: Dry, clean air.

Temperature Limits: Process: -20 to 212°F (-29 to 100°C); Ambient: 5 to 125°F (-15 to 51°C).

Range: Air Velocity: 40 to 5000 FPM (0.2 to 25 m/s); Volumetric Air: 999,999 in selected flow units; Temperature: -20 to 212°F (-29 to 100°C); Relative Humidity: 0 to 100% RH.

Accuracy: Air Velocity: 0.25 to 10 m/s: $\pm 1.5\%$ of reading ± 20 FPM (± 0.1 m/s); 10 to 20 m/s: 1.5% of reading ± 40 FPM (± 0.2 m/s); 20 to 25 m/s: $\pm 1.5\%$ of reading ± 60 FPM (± 0.3 m/s); Temperature: $\pm 0.54^\circ\text{F}$ @ 77°F ($\pm 0.3^\circ\text{C}$ @ 25°C); Relative Humidity: $\pm 2\%$ @ 77°F (25°C) (10 to 90% RH); $\pm 4\%$ (0 to 10% RH and 90 to 100%).

Response Time: Air Velocity and Air Volume: 1 s; Temperature and Relative Humidity: 1.5 s.

Probe Length: 8" (203 mm) insertion.
Battery Charging Limits: 32 to 113°F (0 to 45°C). (Wireless Only).

Power Requirements: 3.7 V YT562447 Lithium ion battery, installed functional, user replaceable. (Note: Intended to be operated with power cables less than 3 m in length). (Wireless Only).

Maximum Wireless Distance: 50' (15 m). (Wireless Only).

Handle Enclosure: Thermoplastic elastomer over polycarbonate.

Supplied With: Wrist strap.

Weight: 13.6 oz (385 g).

Agency Approvals: CE (not while charging), FCC compliant.

MODEL CHART

Model	Description	Price
VP2	Wireless 100 mm vane thermo-anemometer probe for use with the Model UHH handheld meter and the Mobile Meter® Software Test Instrument Mobile App	\$387.00