



INTRINSICALLY SAFE PRESSURE TRANSMITTERS

For Use In Hazardous Locations


CALIBRATION SERVICES AVAILABLE

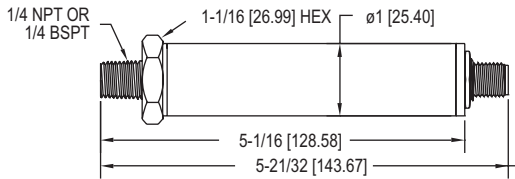


Male NPT/BSPT connector with male M-12 connector

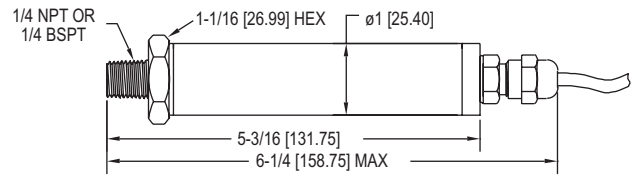

Male NPT/BSPT connector with cable gland

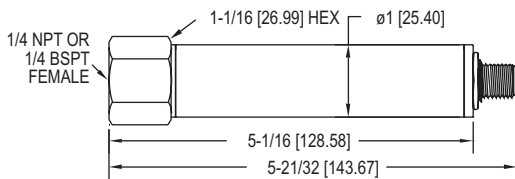

Female NPT/BSPT connector with male M-12 connector

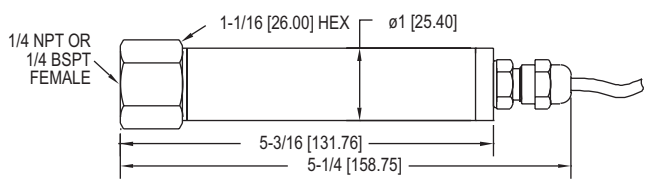

Female NPT/BSPT connector with cable gland



The Dwyer Series IS626 Intrinsicly Safe Pressure Transmitters can be used to accurately measure compatible gases and liquids compatible with its 316/316L stainless steel wetted parts. Series IS626 full-scale accuracy is 0.25%. Designed for industrial environments with a NEMA 4X (IP66) housing, this transmitter resists most effects of shock and vibration. Models are available with a 3' cable or M-12 4 pin connection.

The IS626 is UL listed for use in Hazardous (Classified) Locations. The protection method is by Intrinsic Safety, "ia". It was investigated by UL under UL Standard 913 Sixth Edition and CSA Standard No. 157-92.

FEATURES/BENEFITS

- Exceptional accuracy for insuring tight-control and minimizing costly out of specification conditions
- NEMA 4x rated enclosure provides protection in harsh environments permitting outdoor monitoring or in areas where dust and particulate matter exists
- Robust sensor provides shock and vibration resistance insuring stability in controlling pressure for process applications

APPLICATIONS

- Monitoring pressure in hazardous environments
- Process

SPECIFICATIONS

- Service:** Compatible gases and liquids.
- Wetted Materials:** Type 316, 316L SS.
- Accuracy:** 0.25% FS.
- Temperature Limit:** 0 to 176°F (-18 to 80°C).
- Compensated Temperature Range:** 0 to 176°F (-18 to 80°C).
- Thermal Effect:** ±0.02% FS/°F (includes zero and span).
- Pressure Limits:** See Pressure Range Table.
- Power Requirements:** 10-28 VDC.
- Output Signal:** 4-20 mA.
- Response Time:** 50 ms.
- Loop Resistance:** 0-900 Ω max.
- Current Consumption:** 38 mA (max).
- Electrical Connections:** 3 ft cable or 4-pin M-12 connector.
- Process Connection:** 1/4" male or female NPT and BSPT.
- Enclosure Rating:** NEMA 4X (IP66).
- Mounting Orientation:** Mount in any position.
- Weight:** 8.9 oz (252 g).
- Agency Approvals:** CE, cULus Intrinsicly Safe to UL Standard 913.

For use in Hazardous (Classified) Locations:

- Class I Div. 1 Groups A,B,C,D
- Class II Div. 1 Groups E,F,G
- Class III Div. 1

Temperature Code: T4 @ 80°C ambient

Install in accordance with control drawing 01-700797-00.

WARNING To prevent ignition of flammable or combustible atmospheres, disconnect power before servicing.

Use with approved safety barriers using entity evaluation.

MODEL CHART

Model	Range	Maximum Pressure (psig)	Over Pressure (psig)	Price
IS626-07-GH-P1-E1-S1	15 psig	30	150	\$250.00
IS626-08-GH-P1-E1-S1	30 psig	60	300	250.00
IS626-09-GH-P1-E1-S1	50 psig	100	300	250.00
IS626-10-GH-P1-E1-S1	100 psig	200	500	250.00
IS626-11-GH-P1-E1-S1	150 psig	300	750	250.00
IS626-12-GH-P1-E1-S1	200 psig	400	1000	250.00
IS626-13-GH-P1-E1-S1	300 psig	600	1500	250.00
IS626-14-GH-P1-E1-S1	500 psig	1000	2500	250.00

Note: For optional M-12 4 pin electrical connection, change E1 to E6 and +\$55.50 to above prices.

OPTIONS

To order add suffix:	Description	Price
-NIST	NIST traceable calibration certificate	\$139.00 ^(N)
Example: IS626-07-GH-P1-E1-S1-NIST		
^(N) Items are net priced and are not subject to any discount.		

ACCESSORIES

Model	Description	Price
A-295	Female four pin M-12 to cable gland connector	\$66.50 ^(B)
A-231	16' (5 m) shielded cable with 4 pin female M-12 connection	86.50 ^(B)
MTL5541	Galvanic barrier	839.00 ^(B)
MTL7706	Intrinsicly safe zener barrier	453.00 ^(B)

^(B) Items are subject to Schedule B discounts.