


# ATEX/IECEx APPROVED PHOTOHELIC® SWITCH/GAGES WITH 24 VDC POWER

3000MR or 3000MRS Series in Flame-Proof ATEX/IECEx Enclosures

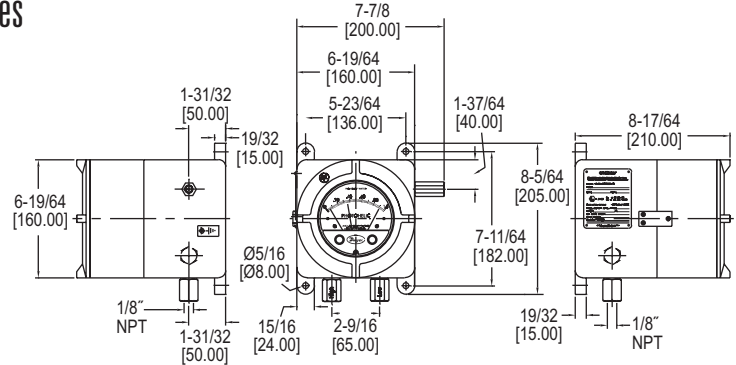

Using solid state technology, the Series AT23000MR & AT23000MRS ATEX/IECEx Approved Photohelic® Switch/Gage with 24 VDC Power combines the functions of a precise, highly repeatable differential pressure switch with a large easy-to-read analog pressure gage. Gage reading is unaffected by switch operation and will indicate accurately even if power is interrupted. AT23000MR series employ versatile electromechanical relays with low amperage ratings-ideal for dry circuits. For applications requiring high cycle rates, choose AT23000MRS models with SPST (NO) solid state relays. Easy to adjust set point indicators are controlled by knobs located on the gage face (accessible opening case after de-energizing instrument). All models provide both low and high limit control. Compatible with air and other non-combustible, non-corrosive gases, they can be used in systems with pressures to 25 psig (1.725 bar). Optional construction is available for use to either 35 psig (2.42 bar) or 80 psig (5.51 bar). Flame-proof enclosures are available with glass window which allows for viewing of set point needles and process pressure. Compatible with air and other non-combustible, non-corrosive gases, they can be used in systems with pressures to 25 psig (1.725 bar). Optional construction is available for use to either 35 psig (2.42 bar) or 80 psig (5.51 bar).

**FEATURES/BENEFITS**

- Gage reading unaffected by switch operation and will continue to read pressure even during power loss
- Zero and range adjustments outside of gage means no disassembly in normal service
- Solid-state design allows for switching in high cycle rate applications without degradation
- Flame-proof enclosure with optional glass window and aluminum housing protects the device in hazardous areas while giving local visibility to process pressure and set point status

**APPLICATIONS**

- Hazardous area pressure measurement and switching
- Pneumatic conveying
- Air conditioning systems
- Clean rooms
- Fume exhaust systems

**Attention:** Check local safety rules and warnings on unit and manual for a correct use of the instrument in hazardous area.

RANGE CHART					
Model	Range in w.c.	Minor Divis.	Model	Range, Pa	Minor Divis.
3000-00	0 to 0.25	.005	3000-60PA	0 to 60	2.0
3000-0	0 to 0.5	.01	3000-125PA	0 to 125	5.0
3001	0 to 1.0	.02	3000-250PA	0 to 250	5.0
3002	0 to 2.0	.05	3000-500PA	0 to 500	10.0

MODEL CHART													
Example	AT2	3001	MR	-X	X	X	-A	B	1	X	T2	AT23001MR-XXX-AB1XT2	Price
Housing	AT2											ATEX/IECEx approved Photohelic® switch/gages	-
Range		3XXX										Specify range by using Photohelic® model number. See range chart.	-
Relay			MR									Electromechanical relay Solid state relay	\$1649.00 <sup>(B)</sup> +62.50 <sup>(B)</sup>
Pressure Rating				X	MP	HP						Standard -25 in Hg to 25 psig Medium pressure max. static 35 psig High pressure max. static 80 psig	- +101.00 <sup>(B)</sup> +281.00 <sup>(B)</sup>
Construction				X								Standard silicone construction	-
Temperature Rating						X	LT					Standard temperature 20 to 120°F Low temperature to -20°F	+29.75 <sup>(B)</sup>
Housing Material								A				Aluminum	-
Cover										B	O	Blind Glass top cover	+56.50 <sup>(B)</sup>
Process Connection											1 2	1/8" NPT female brass ports 1/8" NPT female SS ports	+126.00 <sup>(B)</sup>
Overpressure Plug										X	OPV	Standard without overpressure relief valve Overpressure relief valve Material same as ports	+62.00 <sup>(B)</sup> brass +107.00 <sup>(B)</sup> SS
Tag											T2	SS information label	-

<sup>(B)</sup> Items are subject to Schedule B discounts.

**SPECIFICATIONS**

**Service:** Air and non-combustible, compatible gases.  
**Wetted Materials:** Consult factory.  
**Housing Material:** Aluminum.  
**Finishing:** Texture epoxy coat RAL7038.  
**Accuracy:** ±2% of FS at 70°F (21.1°C). ±3% on -0, -60 Pa and ±4% on -00 models.  
**Pressure Limits:** -20 in Hg to 25 psig (-0.677 bar to 1.72 bar). MP option: 35 psig (2.41 bar), HP option: 80 psig (5.52 bar).  
**Temperature Limits:** 20 to 120°F. (-6.67 to 48.9°C). Option LT low temperature to -20°F (28.8°C) (**Note:** Product temperature limits differ from case).  
**Power Requirements:** 24 VDC, regulated ±10%.  
**Electrical Wiring:** Screw terminals.  
**Mounting Orientation:** Diaphragm in vertical position.  
**Enclosure Rating:** IP66. IP65 with option OPV, overpressure relief valve.  
**Process Connections:** 1/8" NPT female brass (SS optional). In presence of acetylene it is necessary to use SS.  
**Electrical Connections:** Two 1/2" NPT female. Cable gland not included.  
**Dial Size:** 4" (101.6 mm).  
**Set Point Adjustment:** Adjustable knobs on face behind enclosure cover. Follow instructions and safety warnings to open cover.  
**Weight:** 12.5 lb (5.7 kg).  
**ATEX Certificate:** BVI 14ATEX0072.  
**Agency Approvals:** ATEX Compliant **CE** 1370 **Ex** II 2G Ex d IIC T6 Gb / II 2D Ex tb IIIC T85°C Db, -60°C≤Tamb≤+60°C IECEx Compliant: Ex d IIC T6 Gb / Ex tb IIIC T85°C Db.

**SWITCH SPECIFICATIONS (3000MR)**

**Switch Type:** Each set point has 1 Form C relay (SPDT).  
**Relay Contacts:** (resistive load) 1 Form C rated 1.0 A @ 30 VDC, 0.3 A @ 110 VDC or 0.5 A @ 125 VAC. Gold over clad silver - suitable for dry circuits.

**SWITCH SPECIFICATIONS (3000MRS)**

**Switch Type:** Each set point has a solid state relay.  
**Switching Voltage:** 20 to 280 VAC (47 to 63 Hz).  
**Switching Current:** 1.0 amp (AC) max., 0.01 mA (AC) min., (2) SPST NO.