




Series
BTG

Bulk Tanker Gage

Monitor Tank Unloading Discharge Pressure

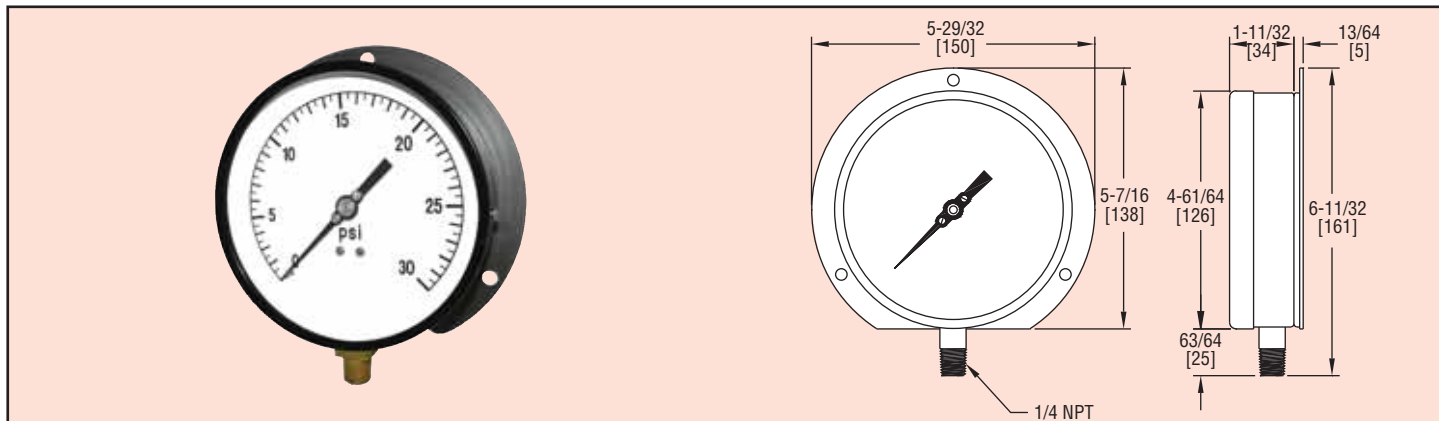

The Series BTG Bulk Tanker Gages possess psi scales with 1% full scale ANSI B40.1 Grade 1A accuracy. The BTG gage is perfect for use on tanker trucks for monitoring discharge pressures while tank is being unloaded. The 4.5" BTG gages are designed with an epoxy coated black steel housing that is rust and corrosion resistant. The BTG gages are designed with a silicone dampened counter weight attached to the movement which allows the units to withstand vibration. Wetted parts include a brass socket and phosphor bronze Bourdon tube. Units can withstand temperatures of -40 to 160°F (-40 to 71°C). Units come with a 1/4" male NPT bottom connection.

Model	Range
BTG-G0322N	0-30 psi
BTG-G2222N	30" Hg-0-30 psi

SPECIFICATIONS

Service: Compatible gases and liquids.

Wetted Materials: Brass socket, phosphor bronze Bourdon tube.

Housing: Epoxy coated black steel case with removable back flange.

Lens: Plastic.

Accuracy: 1% full scale ANSI B40.1 Grade 1A.

Pressure Limit: 110% of full scale.

Temperature Limits: -40 to 160°F (-40 to 71°C).

Size: 4.5" (115 mm).

Process Connection: 1/4" male NPT lower.

Weight: 17.6 oz (499 g).