



Series
CDT


Carbon Dioxide/Temperature Transmitter

NDIR CO₂ Sensor, Universal Outputs, Optional Relay



AIR QUALITY

Carbon Dioxide Transmitters

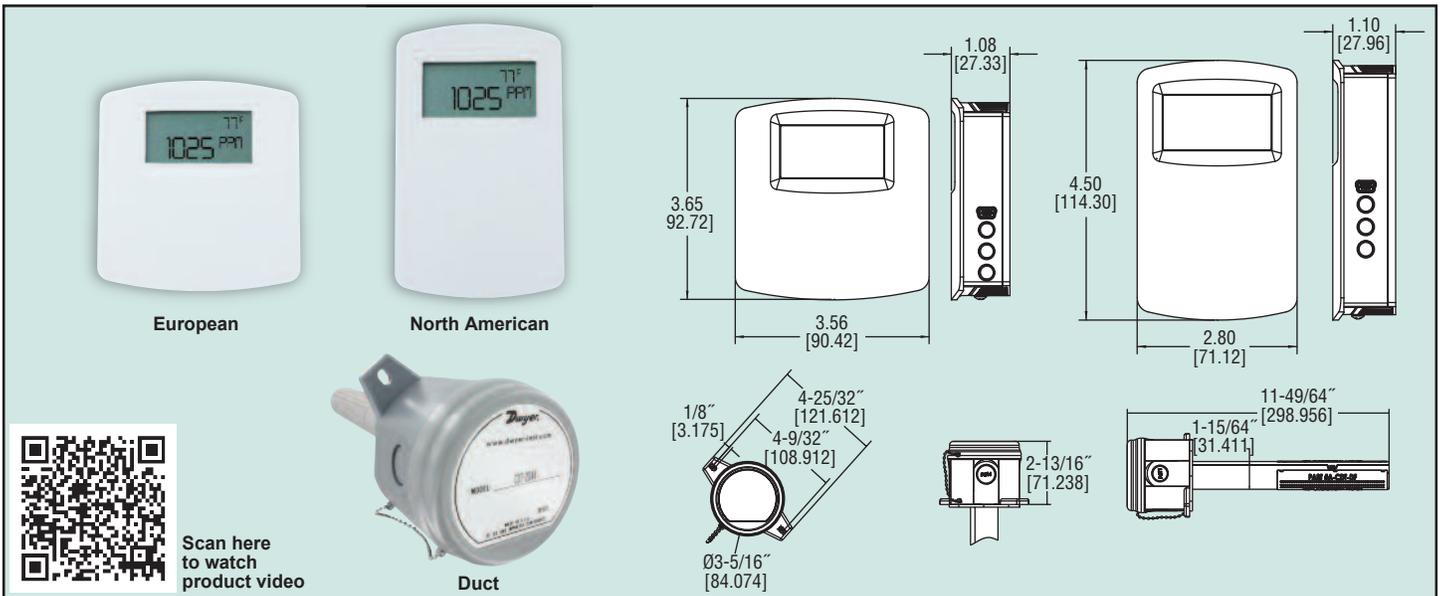

Series CDT Carbon Dioxide and Temperature Transmitters accurately monitor the CO₂ concentration and temperature in schools, office buildings, and other indoor environments to help achieve LEED® certification. For increased sensor accuracy, a single-beam dual-wavelength non-dispersive infrared (NDIR) sensor is used to automatically correct the measurement in both occupied and unoccupied buildings against light source aging effects. The single-beam dual-wavelength sensor technology provides the highest level of accuracy compared to Automatic Baseline Correction methods which can unintentionally shift the calibration based on CO₂ levels and barometric pressure conditions. In order to achieve a higher level of accuracy, the Series CDT includes digital barometric pressure adjustment and the ability to field-calibrate the sensor.

Universal outputs for both carbon dioxide and temperature allow users to select the transmitter output to be 4 to 20 mA, 0 to 5 VDC, or 0 to 10 VDC to work with virtually any building management controller. Additionally, a passive thermistor or RTD sensor can be ordered for a temperature output. An optional relay with user adjustable set points can be used to control exhaust fans, open actuated windows or dampers, or signal a light or horn. For applications that require visual indication, the wall mount configurations of the Series CDT can be ordered with an integral LCD display. When ordering a duct mount configuration or a wall mount configuration without the display, the Model A-449 or A-449A remote LCD display can plug into the miniature connector port on the transmitter. The display can be configured to display temperature only, CO₂ only, or CO₂ and temperature together. Push buttons are standard on all configurations of the transmitters for access to the menu structure, but wall mount configurations can be ordered without the buttons. To prevent tampering, the action of the buttons can be locked out using an internal dip switch selection. Menu items that can be accessed via the push buttons include: engineering units, relay output set points, display configuration, transmitter output scaling, ambient barometric pressure, and field calibration of the transmitter.

Single beam dual-wavelength sensor advantages:

- Automatically corrects for aging effects in occupied and unoccupied buildings*
 - Perfect for hospitals and manufacturing plants that are occupied 24 hours per day
- Measures actual unfiltered light intensity directly
 - Eliminates error from incorrect assumptions of gas concentration in theoretical logic assumption methods

* For buildings occupied 24 hours per day, it is recommended that calibration be verified every 6 to 12 months depending on application.

ACCESSORIES

A-449, Remote LCD Display allows remote indication of select Dwyer® Wall Mount Transmitters for validation or certification purposes

A-449A, Remote LCD Display with buttons allows remote indication and calibration of select Dwyer® Wall Mount Transmitters for validation and certification purposes



SPECIFICATIONS

- Sensor:** Single beam, dual-wavelength NDIR.
- Range:** CO₂: 0 to 2000 or 0 to 5000 ppm (depending on model); Temperature: 32 to 122°F (0 to 50°C).
- Accuracy:** CO₂: ±40 ppm ±3% of reading; RH: ±2% (10 to 90% RH); Temperature: ±1°C @ 25°C.
- Temperature Dependence:** ±8 ppm/°C at 1100 ppm.
- Non-Linearity:** 16 ppm.
- Pressure Dependence:** 0.13% of reading per mm of Hg.
- Response Time:** 2 min for 99% step change.

- Duct Air Velocity Range:** 0-4000 FPM (20.32 m/s).
- Temperature Limits:** 32 to 122°F (0 to 50°C).
- Humidity Limits:** 10 to 95% RH (non-condensing).
- Power Requirements:** 16 to 35 VDC or 19 to 28 VAC.
- Power Consumption:** Average: 2 w; Peak: 3.75 w.
- Output:** Current: 4 to 20 mA (max. 500 Ω); Voltage: 0 to 5 VDC or 0 to 10 VDC (min. 500 Ω); Relay: SPST NO rated 2A @ 30 VDC.
- Weight:** 4.4 oz (125 g).
- Agency Approvals:** CE.

Series	CDT	-2	N	4	4	-LCD	Example: CDT-2N44-LCD
Range		2					0 to 2000 ppm CO ₂ range 0 to 5000 ppm CO ₂ range
Configuration			N E D				North American Wall Mount European Wall Mount Duct Mount
CO₂ Output				4			4 to 20 mA / 0 to (5 or 10) VDC
Temperature Output					0 4 A B C D E F		None 4 to 20 mA / 0 to (5 or 10) VDC 10 KΩ NTC thermistor type III 10 KΩ NTC thermistor type II 3 KΩ NTC thermistor Pt100 Ω RTD Pt1000 Ω RTD 20 KΩ NTC thermistor
Options						-FC -LCD -RLY -NBC	Factory Calibration Certificate LCD display (wall only) Relay No buttons (wall only)

GCK-200CO-2000CO₂, Calibration Gas Kit includes a 99.99% Nitrogen gas cylinder for calibrating the zero point and a 200 PPM CO / 2000 PPM CO₂ gas cylinder for calibrating the span point on Dwyer's gas sensing transmitters



A-CDT-KIT, Accessory Kit including Terminal Block and Power Supply

LEED® is a registered trademark of the U.S. Green Building Council.