


# HAZARDOUS AREA HUMIDITY/TEMPERATURE TRANSMITTER

Intrinsically Safe or Explosion-Proof Models

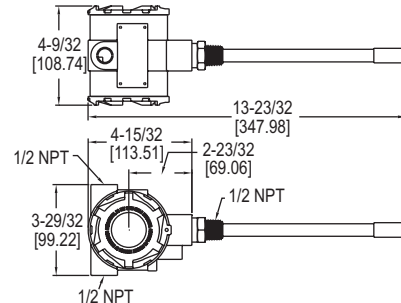

The Series HHT Hazardous Area Humidity/Temperature Transmitter takes accurate measurements in the harshest of environments. The explosion-proof model is offered with 4 to 20 mA output for humidity only. The intrinsically safe version is offered with 4 to 20 mA output for humidity and temperature, and do require an intrinsically safe barrier to meet hazardous area approvals.

## FEATURES/BENEFITS

- FM approved explosion-proof and intrinsically safe models
- Integral LCD option
- Dual temperature and relative humidity output models

## APPLICATIONS

- Process monitoring
- Offshore HVAC monitoring
- Dust and grain handling

## MODEL CHART

Model	Protection	Description	Display	Price
HHT-EU	Explosion-proof	Humidity	No	\$860.00
HHT-IU	Intrinsically safe	Humidity	No	652.00
HHT-IT	Intrinsically safe	Humidity/temperature	No	683.00
HHT-EU-LCD	Explosion-proof	Humidity	Yes	917.00
HHT-IT-LCD	Intrinsically safe	Humidity/temperature	Yes	740.00

## ACCESSORIES

Model	Description	Price
KFD0-SCS-EX1.55® A-287	Loop powered galvanic isolator Mounting bracket for pipe or surface mounting (Includes bracket and two 2" U-bolts)	\$509.00® 11.75
A-450	Replacement sintered filter	8.00

® Items are subject to Schedule B discounts.

## SPECIFICATIONS

**Relative Humidity Range:** 0 to 100% RH.

**Temperature Range:** -40 to 140°F (-40 to 60°C).

**Accuracy:** ±2% 10 to 90% RH, ±0.9°F at 72°F (±0.3°C at 25°C).

**Hysteresis:** ±1%.

**Repeatability:** ±0.1% typical.

**Temperature Limits:** -40 to 140°F (-40 to 60°C).

**Storage Temperature:** -40 to 176°F (-40 to 80°C).

**Compensated Temperature:** -40 to 140°F (-40 to 60°C).

**Power Requirements:** For intrinsically safe models HHT-IX, 9.5 to 28 VDC. For explosion-proof models HHT-EX, 16.5 to 28 VDC.

**Output Signal:** 4 to 20 mA, 2 channels for humidity/temperature models (loop power on RH).

**Response Time:** 15 s.

**Electrical Connections:** Screw terminal block.

**Conduit Connection:** 1/2 female NPT. **Drift:** < 1% RH/year.

**RH Sensor:** Capacitance polymer. **Temperature Sensor:** Solid state band gap.

**Housing Material:** Aluminum. **Display:** Optional 2 line alpha numeric, 8 characters/line. Temperature display is °F/°C selectable.

**Display Resolution:** RH: 0.1%; Temperature: 0.1°F (0.1°C).

**Weight:** 2 lb 8 oz (1134 g).

**Enclosure Rating:** NEMA 4X (IP66). Models HHT-EX: FM Explosion-Proof, Class I Div. 1 Group B, C, D, Class II Div. 1 Group E, F, G, Class III Div. 1; Models HHT-IX: FM Intrinsically Safe, Class I Div. 1 Group A, B, C, D, Class II Div. 1 Group E, F, G, Class III Div. 1 T4.

**Agency Approvals:** CE, FM.