

## SERIES PBLT2 & PBLTX | MERCOID SUBMERSIBLE LEVEL TRANSMITTERS

### FEATURES/BENEFITS

- Durable cage design with large diameter 316 SS diaphragm seal that is non-clogging and damage resistant to floating solids
- Incorporates lightning and surge protection utilizing dual arrestor technology, grounded to case, eliminating both power supply surges and lightning ground strike transients (surge protection is not guaranteed and is not covered by warranty) on PBLT2 models
- Maintenance free filter eliminates particulate or water droplets from entering and damaging the transducer
- UL approved intrinsically safe on PBLTX models for use in hazardous locations when used with proper barrier
- Excellent chemical compatibility for wide application use
- NPT connection allows the unit to be rigidly installed in a pipe/conduit, or the addition of a A-625 hanging loop for attaching a chain for pulling out of the installation
- Standard 72 hour lead time ensures minimal downtime

NOW WITH 72 HOUR  
OUT OF STOCK LEAD TIME!



### APPLICATIONS

- Wastewater
- Sludge pits, clarifiers, digesters
- Alum tanks
- Chemical storage tanks
- Oil tanks
- Lime slurry
- Sumps
- Reservoirs


### DESCRIPTION

The Series PBLT2 & PBLTX Submersible Level Transmitters are manufactured for years of trouble free service in the harshest applications. This Series measures the height of liquid above the position in the tank referenced to atmospheric pressure. The transmitter consists of a piezoresistive sensing element, encased in a 316 SS housing with cage and large diameter 316 SS diaphragm seal.


### SPECIFICATIONS

<b>Service</b>	Compatible liquids.
<b>Wetted Materials</b>	316 SS, 316L SS, epoxy, cable: ETFE or polyurethane.
<b>Accuracy</b>	±0.25% FS (includes linearity, hysteresis, and repeatability)*.
<b>Temperature Limit</b>	PBLT2: 0 to 200°F (-18 to 93°C); PBLTX: ETFE -4 to 176°F (-20 to 80°C); Polyurethane: -4 to 149°F (-20 to 65°C).
<b>Compensated Temperature Range</b>	PBLT2: 0 to 180°F (-18 to 82°C); PBLTX: 0 to 176°F (-18 to 80°C).
<b>Thermal Effect</b>	±0.02% FS/°F.
<b>Pressure Limit</b>	2X FS.
<b>Power Requirement</b>	PBLT2: 13 to 30 VDC, PBLTX: 10 to 28 VDC.
<b>Output Signal</b>	4 to 20 mA DC, two wire.
<b>Response Time</b>	50 ms.
<b>Loop Resistance</b>	900 Ω.
<b>Electrical Connection</b>	Wire pigtail.
<b>Mounting Orientation</b>	Suspended in tank below level being measured.
<b>Electrical Protection</b>	PBLT2: Lightning and surge protection; PBLTX: none.
<b>Weight</b>	4.3 lb (2.0 kg).
<b>Agency Approvals</b>	PBLT2: CE, PBLTX: CE, cULus intrinsically safe for Class I, Div. 1, Groups A, B, C, D; Class II, Div. 1, Groups E, F, G; Class III, Div. 1. (According to control drawing 01833-44)**.
*Configured ranges below 5 psi (11.54 ft w.c.) (3.52 m w.c.) ±1% FS accuracy	
**Up to 196 ft (59.5 m) for ETFE cable; Up to 333 ft (101.5 m) for polyurethane cable	



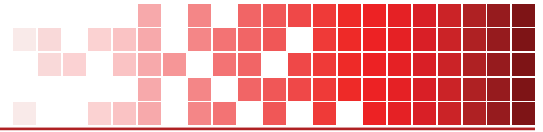


## DIMENSIONS

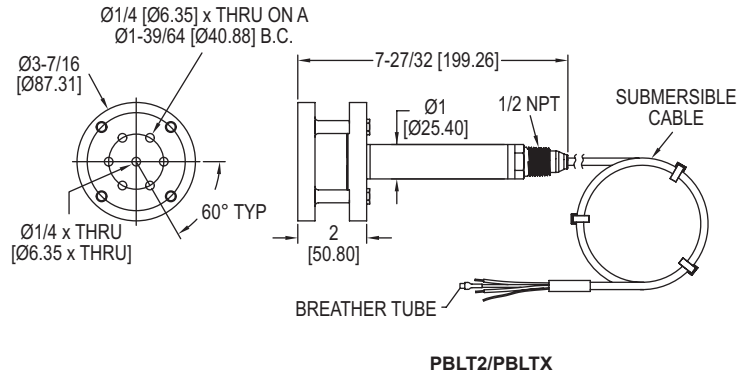

## HOW TO ORDER

Use the **bold** characters from the chart below to construct a product code.

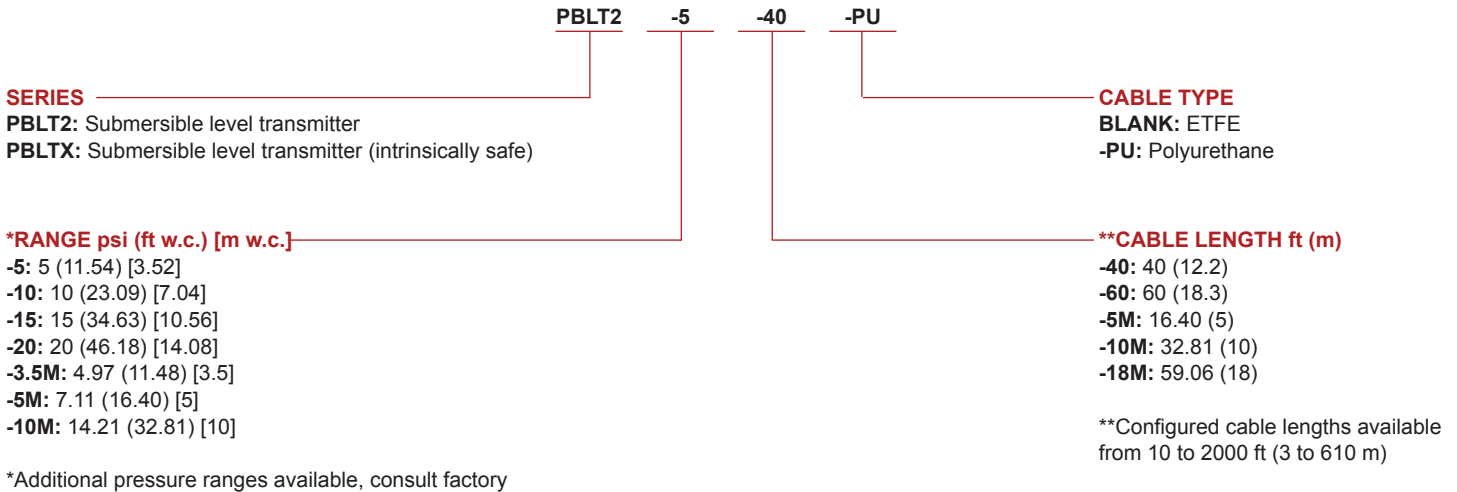

## ACCESSORIES

Model	Description
<b>MTL5041</b>	Intrinsically safe galvanic isolator
<b>MTL7706</b>	Intrinsically safe zener barrier
<b>A-297</b>	Dessicant filter for vent tube. Removes humidity for protection of the sensor. Changes color to show saturation
<b>A-625</b>	316 SS cable hanger for attaching chain for easy pulling out of application

Important Notice: Dwyer Instruments, Inc. reserves the right to make changes to or discontinue any product or service identified in this publication without notice. Dwyer advises its customers to obtain the latest version of the relevant information to verify, before placing any orders, that the information being relied upon is current.

