




Series
2000

Magnehelic® Differential Pressure Gages

Indicate Positive, Negative or Differential, Accurate within 2%

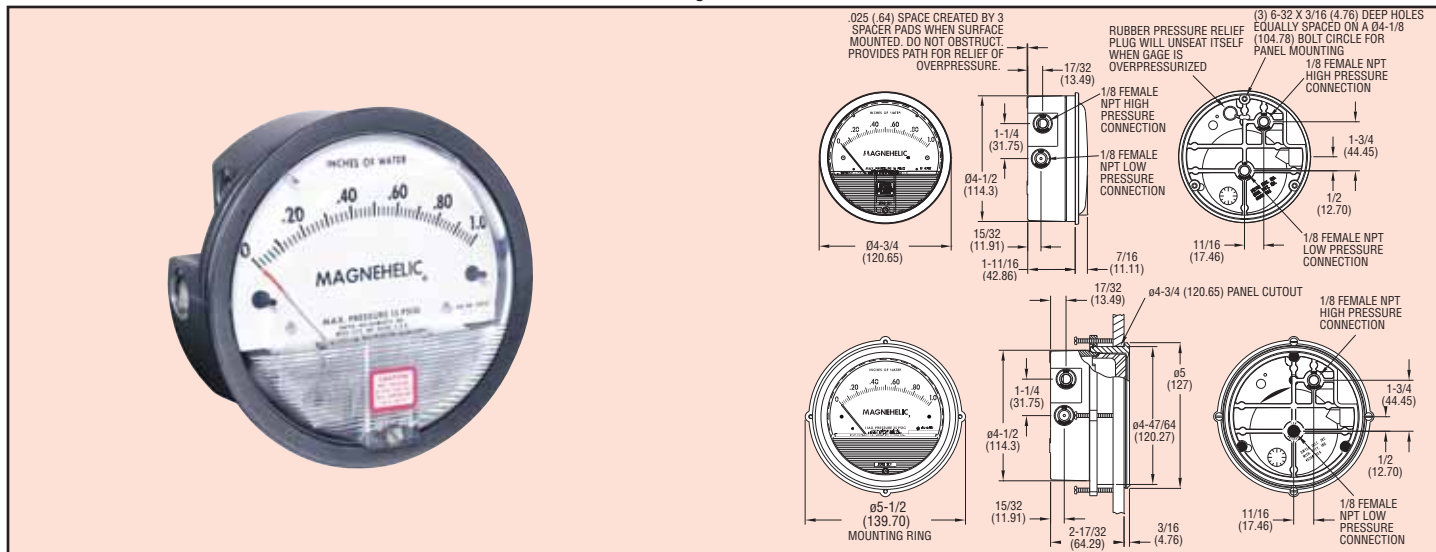

Select the Dwyer® Magnehelic® gage for high accuracy – guaranteed within 2% of full scale – and for the wide choice of 81 models available to suit your needs precisely. Using Dwyer's simple, frictionless Magnehelic® gage movement, it quickly indicates low air or non-corrosive gas pressures – either positive, negative (vacuum) or differential. The design resists shock, vibration and over-pressures. No manometer fluid to evaporate, freeze or cause toxic or leveling problems. It's inexpensive, too.

The Magnehelic® gage is the industry standard to measure fan and blower pressures, filter resistance, air velocity, furnace draft, pressure drop across orifice plates, liquid levels with bubbler systems and pressures in fluid amplifier or fluidic systems. It also checks gas-air ratio controls and automatic valves, and monitors blood and respiratory pressures in medical care equipment.

Note: May be used with hydrogen. Order a Buna-N diaphragm. Pressures must be less than 35 psi.



Flush, Surface or
Pipe Mounted

Mounting

A single case size is used for most models of Magnehelic® gages. They can be flush or surface mounted with standard hardware supplied. With the optional **A-610** Pipe Mounting Kit they may be conveniently installed on horizontal or vertical 1-1/4" - 2" pipe. Although calibrated for vertical position, many ranges above 1" may be used at any angle by simply re-zeroing. However, for maximum accuracy, they must be calibrated in the same position in which they are used. These characteristics make Magnehelic® gages ideal for both stationary and portable applications. A 4-9/16" hole is required for flush panel mounting. Complete mounting and connection fittings plus instructions are furnished with each instrument.

Vent Valves

In applications where pressure is continuous and the Magnehelic® gage is connected by metal or plastic tubing which cannot be easily removed, we suggest using Dwyer A-310A vent valves to connect gage. Pressure can then be removed to check or re-zero the gage.

High and Medium Pressure Models

Installation is similar to standard gages except that a 4-13/16" hole is needed for flush mounting. The medium pressure construction is rated for internal pressures up to 35 psig and the high pressure up to 80 psig. Available for all models. Because of larger case, the medium pressure and high pressure models will not fit in a portable case size. Installation of the A-321 safety relief valve on standard Magnehelic® gages often provides adequate protection against infrequent overpressure.

① See Note.



SPECIFICATIONS

Service: Air and non-combustible, compatible gases (natural gas option available).

Wetted Materials: Consult factory.

Housing: Die cast aluminum case and bezel, with acrylic cover. Exterior finish is coated gray to withstand 168 hour salt spray corrosion test.

Accuracy: ±2% of full scale (±3% on -0, -100 Pa, -125 Pa, 10MM and ±4% on -00, -60 Pa, -6MM ranges), throughout range at 70°F (21.1°C).

Pressure Limits: -20" Hg to 15 psig† (-0.677 to 1.034 bar); MP option: 35 psig (2.41 bar); HP option: 80 psig (5.52 bar).

Overpressure: Relief plug opens at approximately 25 psig (1.72 bar), standard gages only. See Overpressure Protection Note on next page.

Temperature Limits: 20 to 140°F* (-6.67 to 60°C).

Size: 4" (101.6 mm) diameter dial face.

Mounting Orientation: Diaphragm in vertical position. Consult factory for other position orientations.

Process Connections: 1/8" female NPT duplicate high and low pressure taps - one pair side and one pair back.

Weight: 1 lb 2 oz (510 g), MP & HP 2 lb 2 oz (963 g).

Standard Accessories: Two 1/8" NPT plugs for duplicate pressure taps, two 1/8" pipe thread to rubber tubing adapter and three flush mounting adapters with screws. (Mounting and snap ring retainer substituted for 3 adapters in MP & HP gage accessories.)

*Low temperature models available as special option.

†For applications with high cycle rate within gage total pressure rating, next higher rating is recommended. See Medium and High pressure options at lower left.

OPTIONS AND ACCESSORIES



Transparent Overlays

Furnished in red and green to highlight and emphasize critical pressures. **\$20.00 net**



Adjustable Signal Flag

Integral with plastic gage cover. Available for most models except those with medium or high pressure construction. Can be ordered with gage or separate. Add suffix **-ASF** to end of gage model number **10.00**



LED Setpoint Indicator

Bright red LED on right of scale shows when setpoint is reached. Field adjustable from gage face, unit operates on 12-24 VDC. Requires MP or HP style cover and bezel.

① See Note.

Add suffix **-SP** to end of gage model number **134.00**

Quality design and construction features

Bezel provides flange for flush mounting in panel.

Clear plastic face is highly resistant to breakage. Provides undistorted viewing of pointer and scale.

Precision litho-printed scale is accurate and easy to read.

Red tipped pointer of heat treated aluminum tubing is easy to see. It is rigidly mounted on the helix shaft.

Pointer stops of molded rubber prevent pointer over-travel without damage.


"Wishbone" assembly provides mounting for helix, helix bearings and pointer shaft.

Jeweled bearings are shock-resistant mounted; provide virtually friction-free motion for helix. Motion damped with high viscosity silicone fluid.

Zero adjustment screw is conveniently located in the plastic cover, and is accessible without removing cover. O-ring seal provides pressure tightness.

Helix is precision made from an alloy of high magnetic permeability. Mounted in jeweled bearings, it turns freely, following the magnetic field to move the pointer across the scale.

Calibrated range spring is flat spring steel. Small amplitude of motion assures consistency and long life. It reacts to pressure on diaphragm. Live length adjustable for calibration.

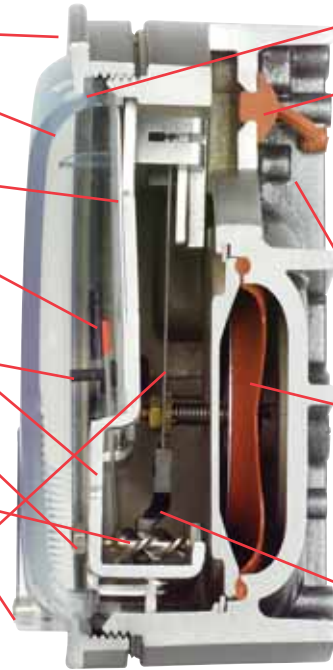

O-ring seal for cover assures pressure integrity of case.

OVERPRESSURE PROTECTION

Blowout plug is comprised of a rubber plug on the rear which functions as a relief valve by unseating and venting the gage interior when over pressure reaches approximately 25 psig (1.7 bar). To provide a free path for pressure relief, there are four spacer pads which maintain 0.023 inch clearance when gage is surface mounted. Do not obstruct the gap created by these pads.

The blowout plug is not used on models above 180 inches of water pressure, medium or high pressure models, or on gages which require an elastomer other than silicone for the diaphragm.

The blowout plug should not be used as a system overpressure control. High supply pressures may still cause the gage to fail due to over pressurization, resulting in property damage or serious injury. Good engineering practices should be utilized to prevent your system from exceeding the ratings or any component.

Die cast aluminum case is precision made and iridite-dipped to withstand 168 hour salt spray corrosion test. Exterior finished in baked dark gray hammerloid. One case size is used for all standard pressure options, and for both surface and flush mounting.

Silicone rubber diaphragm with integrally molded O-ring is supported by front and rear plates. It is locked and sealed in position with a sealing plate and retaining ring. Diaphragm motion is restricted to prevent damage due to overpressures.

Samarium Cobalt magnet mounted at one end of range spring rotates helix without mechanical linkages.

Series 2000 Magnehelic® Gage — Models and Ranges

Page VI shows examples of special models built for OEM customers. For special scales furnished in ounces per square inch, inches of mercury, metric units, square root scales for volumetric flow, etc., contact the factory.

Model	Range Inches of Water	Price	Model	Range PSI	Price	Model	Range MM of Water	Price	Model	Range, kPa	Price	Dual Scale Air Velocity Units For use with pitot tube	
2000-00N†	0.05-0.2	\$77.45	2201	0-1	\$67.95	2000-6MM†	0-6	\$73.00	2000-0.5KPA	0-0.5	\$63.50	Model	Range in W.C./ Velocity F.P.M.
2000-00†	0-25	73.00	2202	0-2	67.95	2000-10MM†	0-10	63.50	2000-1KPA	0-1	63.50		
2000-0†	0-50	63.50	2203	0-3	67.95	2000-15MM	0-15	63.50	2000-1.5KPA	0-1.5	63.50	2000-0AV†	0-50/ 500-2800
2001	0-1.0	63.50	2204	0-4	67.95	2000-25MM	0-25	63.50	2000-2KPA	0-2	63.50		
2002	0-2.0	63.50	2205	0-5	67.95	2000-30MM	0-30	63.50	2000-2.5KPA	0-2.5	63.50	2002AV	0-2.0/ 1000-5600
2003	0-3.0	63.50	2210*	0-10	169.45	2000-50MM	0-50	63.50	2000-3KPA	0-3	63.50		
2004	0-4.0	63.50	2215*	0-15	169.45	2000-80MM	0-80	63.50	2000-4KPA	0-4	63.50	2010AV	0-10/ 2000-12500
2005	0-5.0	63.50	2220*	0-20	165.45	2000-100MM	0-100	63.50	2000-5KPA	0-5	63.50		
2006	0-6.0	63.50	2230**	0-30	242.00	2000-125MM	0-125	63.50	2000-8KPA	0-8	63.50		
2008	0-8.0	63.50				2000-150MM	0-150	63.50	2000-10KPA	0-10	63.50		
2010	0-10	63.50				2000-200MM	0-200	63.50	2000-15KPA	0-15	63.50		
2012	0-12	63.50				2000-250MM	0-250	63.50	2000-20KPA	0-20	63.50		
2015	0-15	63.50				2000-300MM	0-300	63.50	2000-25KPA	0-25	63.50		
2020	0-20	63.50							2000-30KPA	0-30	63.50		
2025	0-25	63.50	2000-15CM	0-15	\$63.50	Zero Center Ranges			Zero Center Ranges				
2030	0-30	63.50	2000-20CM	0-20	63.50	2300-6MM†	3-0-3	\$99.00	2300-1KPA	5-0-5	\$74.00		
2040	0-40	63.50	2000-25CM	0-25	63.50	2300-10MM†	5-0-5	74.00	2300-2KPA	1-0-1	74.00		
2050	0-50	63.50	2000-50CM	0-50	63.50	2300-20MM†	10-0-10	74.00	2300-2.5KPA	1.25-0-1.25	74.00		
2060	0-60	63.50	2000-80CM	0-80	63.50				2300-3KPA	1.5-0-1.5	74.00		
2080	0-80	63.50	2000-100CM	0-100	63.50	Model	Range, Pa	Price	Dual Scale English/Metric Models				
2100	0-100	63.50	2000-150CM	0-150	67.95	2000-60NPA†	10-0-50	\$77.45	Model	Range, In. W.C.	Range, Pa or kPa	Price	
2120	0-120	63.50	2000-200CM	0-200	67.95	2000-60PA†	0-60	73.00	2000-00D†	0-25	0-62 Pa	\$73.00	
2150	0-150	63.50	2000-250CM	0-250	67.95	2000-100PA†	0-100	63.50	2000-0D†	0-0.5	0-125 Pa	63.50	
2160	0-160	88.50	2000-300CM	0-300	67.95	2000-125PA†	0-125	63.50	2001D	0-1.0	0-250 Pa	67.95	
2180*	0-180	190.00	Zero Center Ranges			2000-250PA	0-250	63.50	2002D	0-2.0	0-500 Pa	67.95	
2250*	0-250	190.00	2300-4CM	2-0-2	\$78.45	2000-300PA	0-300	63.50	2003D	0-3.0	0-750 Pa	67.95	
			2300-10CM	5-0-5	78.45	2000-500PA	0-500	63.50	2004D	0-4.0	0-1.0 kPa	67.95	
			2300-30CM	15-0-15	78.45	2000-750PA	0-750	63.50	2005D	0-5.0	0-1.25 kPa	67.95	
						2000-1000PA	0-100 x 10	63.50	2006D	0-6.0	0-1.5 kPa	67.95	
						Zero Center Ranges			2008D	0-8.0	0-2.0 kPa	67.95	
2300-00†	0.125-0-0.125	\$74.00				Model	Range, Pa	Price	2010D	0-10	0-2.5 kPa	67.95	
2300-0†	.25-0-.25	74.00				2300-60PA†	30-0-30	\$74.00	2015D	0-15	0-3.7 kPa	67.95	
2301	.5-0-.5	74.00				2300-100PA†	50-0-50	74.00	2020D	0-20	0-5 kPa	88.50	
2302	1-0-1	74.00				2300-120PA	60-0-60	74.00	2025D	0-25	0-6.2 kPa	88.50	
2304	2-0-2	74.00				2300-200PA	100-0-100	74.00	2050D	0-50	0-12.4 kPa	88.50	
2310	5-0-5	74.00				2300-250PA	125-0-125	74.00	2060D	0-60	0-15 kPa	88.50	
2320	10-0-10	74.00				2300-300PA	150-0-150	74.00					
2330	15-0-15	74.00				2300-500PA	250-0-250	74.00					
						2300-1000PA	500-0-500	74.00					

ACCESSORIES

A-299, Surface Mounting Bracket	\$31.00
A-300, Flat Flush Mounting Bracket	26.75
A-310A, 3-Way Vent Valve	15.75
A-321, Safety Relief Valve	32.00
A-432, Portable Kit	47.50
A-448, 3-piece magnet kit for mounting Magnehelic® gage directly to magnetic surface	10.25
A-605, Air Filter Kit	35.00
A-610, Pipe Mount Kit	24.00

OPTIONS — To order, add suffix: I.E. 2001-ASF
ASF, Adjustable Signal Flagadd \$10.00
HP, High Pressure Optionadd \$119.00
LT, Low Temperatures to -20°Fadd \$10.00
MP, Med. Pressure Optionadd \$60.00
SP, Setpoint Indicatoradd \$134.00
Scale Overlays, Red, Green, Mirrored or Combination, Specify Locationsadd \$20.00 net