




STATIC PRESSURE TIPS

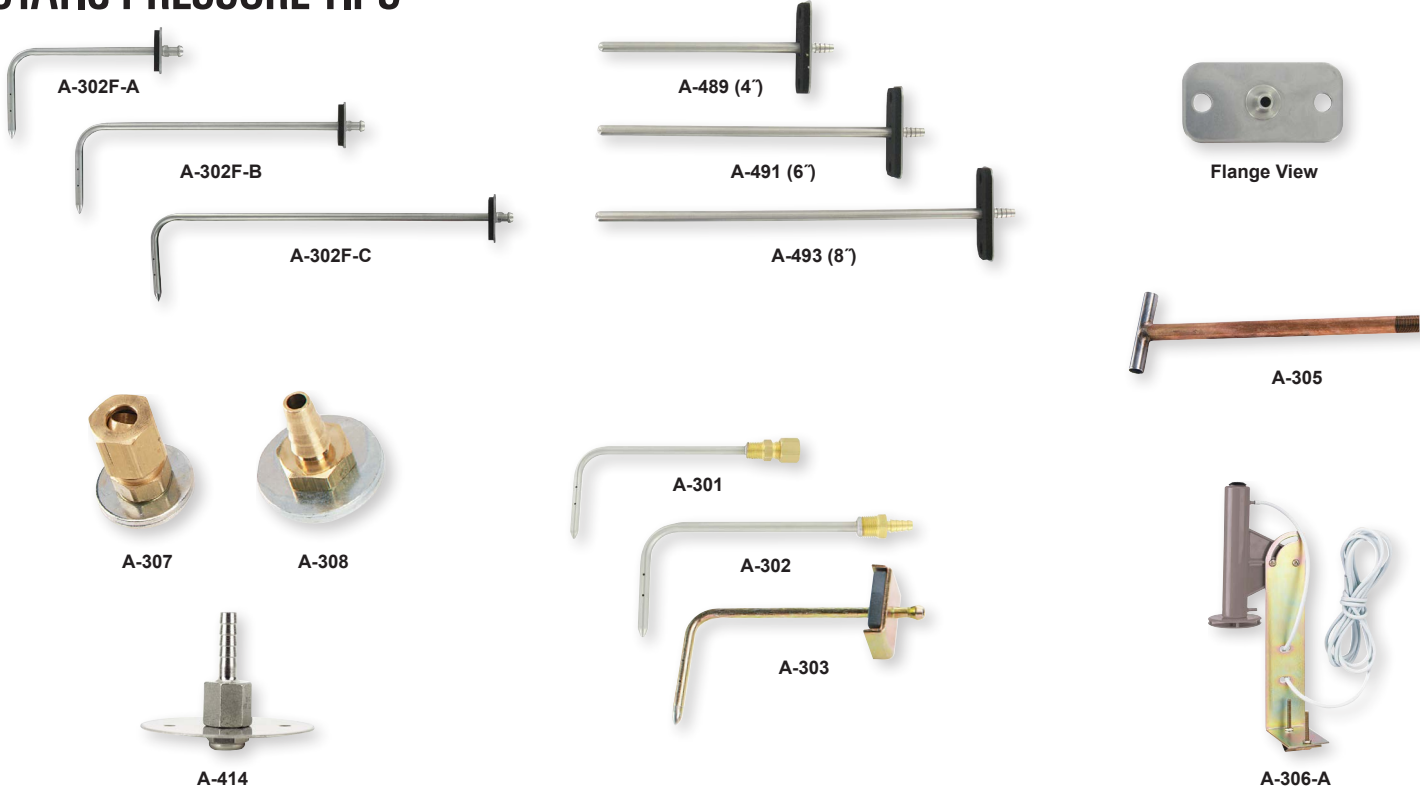

MODEL CHART

Model	Description	Price
The stainless steel static pressure tips are used to measure static pressures in ducts or rooms. They are to be connected to differential pressure switches and transmitters. Two static sensors are used in applications where differential pressure is required across a filter or coil. These sensors include a mounting flange with integral rubber gasket and two screws for simplifying mounting on a duct.		
A-302F-A	4" hook style SS static pressure tip with mounting flange	\$9.20
A-302F-B	6" hook style SS static pressure tip with mounting flange	12.75
A-302F-C	8" hook style SS static pressure tip with mounting flange	14.50
A-489	4" straight SS static pressure tip with mounting flange	6.67
A-491	6" straight SS static pressure tip with mounting flange	6.67
A-493	8" straight SS static pressure tip with mounting flange	7.50
Designed for simplified installation, these are easy to install, inexpensive, and provides accurate static pressure sensing in smooth air at velocities up to 1500 FPM.		
A-307	Static pressure fitting, for 1/4" metal tubing connection	5.30
A-307-SS	SS static pressure fitting, for 1/4" metal tubing connection	40.75
A-308	Static pressure fitting, for 3/16" and 1/8" ID plastic or rubber tubing	4.10
A-414	SS clean room pressure sensor	26.50
These static pressure tips are ideal for applications such as sensing the static pressure drop across industrial air filters and refrigerant coils. Here the probability of air turbulence requires that the pressure sensing openings be located away from the duct walls to minimize impingement and aspiration, and thus ensure accurate readings. For a permanent installation of this type, the Dwyer No. A-301 or A-302 static pressure tip is used. It senses static pressure through radially-drilled holes near the tip and can be used in air flow velocities up to 12,000 FPM. The angled tips shown have 4" insertion depth. Each has four radially drilled .040" sensing holes. All except Model A-303 mount in 3/8" hole in duct. For portable use, a magnet holds No. A-303 in place.		
A-301	Static pressure tip, for 1/4" metal tubing connection	9.90
A-301-A	Static pressure tip, same as A-301 with 6" insertion depth	15.50
A-301-B	Static pressure tip, same as A-301 with 8" insertion depth	18.00
A-301-C	Static pressure tip, same as A-301 with 12" insertion depth	17.75
A-301-SS	SS static pressure tip, for 1/4" metal tubing connection	62.00
A-302	Static pressure tip, for 3/16" and 1/8" ID plastic or rubber tubing	9.10
A-302-A	Static pressure tip, same as A-302 with 6" insertion depth	15.00
A-303	Portable static pressure tip, for 3/16" ID rubber or plastic tubing with 4" insertion	9.95
A-305 low resistance static pressure tip is designed for use in dust-laden air and for rapid response applications. It is recommended where a very low actuation pressure is required for a pressure switch or indicating gage — or where response time is critical.		
A-305	Static pressure tip, low resistance application, furnished with two (2) hex jam nuts and two (2) mounting washers for duct mounting and with 1/8" NPT pipe thread for pressure connection	59.50
A-305-SS	SS static pressure tip, low resistance application, furnished with two (2) hex jam nuts and two (2) mounting washers for duct mounting and with 1/8" NPT pipe thread for pressure connection	99.50
A-306	Outdoor static pressure sensor. Provides average outdoor pressure signal for reference in building pressurization applications. Includes sensor, 50' vinyl tubing, mounting bracket and hardware. Red sensor	53.50
A-306-A	Outdoor static pressure sensor. Provides average outdoor pressure signal for reference in building pressurization applications. Includes sensor, 50' vinyl tubing, mounting bracket and hardware. Gray sensor	53.50

USA: California Proposition 65
 ⚠️WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov