




SERIES TE-I

# IMMERSION TEMPERATURE SENSORS

## Integral Mounting Connection, Welded Thermowells

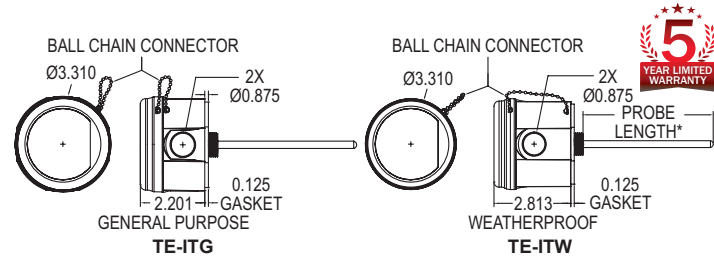

The Series TE-I Immersion Style Temperature Sensors accurately measure water temperature inside chilled and hot water loops in HVAC systems. Thermowells are required to protect the electrical connection from the process water and to allow replacement of the sensors without draining the system.

### FEATURES/BENEFITS

- Integral 1/2" NPSM connection for direct mounting to a thermowell
- 1/4 turn housing cover with chain to prevent dropping
- Multiple conduit knockouts for easy installation positioning
- General purpose or weatherproof enclosure options
- Terminal connection eliminates need for wire nuts

### APPLICATIONS

- Chiller or boiler loops
- Building automation

### SPECIFICATIONS

**Accuracy:** Thermistor temperature sensor:  $\pm 0.22^{\circ}\text{C}$  @  $25^{\circ}\text{C}$  ( $\pm 0.4^{\circ}\text{F}$  @  $77^{\circ}\text{F}$ ); RTD temperature sensor DIN Class A:  $\pm 0.15^{\circ}\text{C}$  @  $0^{\circ}\text{C}$  ( $\pm 0.28^{\circ}\text{F}$  @  $32^{\circ}\text{F}$ ).  
**Temperature Limits:** Operating:  $-40$  to  $302^{\circ}\text{F}$  ( $-40$  to  $150^{\circ}\text{C}$ ).  
**Sensor Curves:** See page reference 1 below.  
**Housing Material:** Meets UL, 94 V-O polycarbonate plastic.  
**Thermowell Material:** 304 SS.  
**Thermowell Connections:** Internal = 1/2" NPSM; External = 1/2" NPT.  
**Weight:** 5.3 oz (150.3 g).

MODEL CHART										
<b>Example</b>	TE	-ITG	-A	25	4	4	-00	TE-ITG-A2544-00		<b>Price</b>
<b>Series</b>	TE							Duct and immersion building automation temperature sensor		-
<b>Mounting Configuration</b>		ITG ITW						Immersion in general purpose housing Immersion in NEMA 4X housing		\$7.30 13.00
<b>Sensor Type</b>			A B C D E F Q					10k $\Omega$ type III thermistor 10k $\Omega$ type II thermistor 3k $\Omega$ thermistor Pt100 $\Omega$ RTD Pt1000 $\Omega$ RTD 20k $\Omega$ thermistor 10k $\Omega$ type III with 11k $\Omega$ shunt		- - +1.50 +3.00 +3.00 - +2.00
<b>Probe Length*</b>				25 04 06 08 12 18				2.5" 4" 6" 8" 12" 18"		- - - - - +3.00
<b>Probe Diameter</b>						4		1/4"		-
<b>Termination</b>							4	4" flying leads terminal block		-
<b>Fittings</b>							00	None (integral)		-

● Resistance vs. Temperature Table: See page 162  
 (Series TE-OND/RND/OSA)

\*Actual probe length is approximately 0.75" longer than listed probe length to ensure maximum immersion into thermowells.