


Gage Tubing Accessories

Gage Tubing

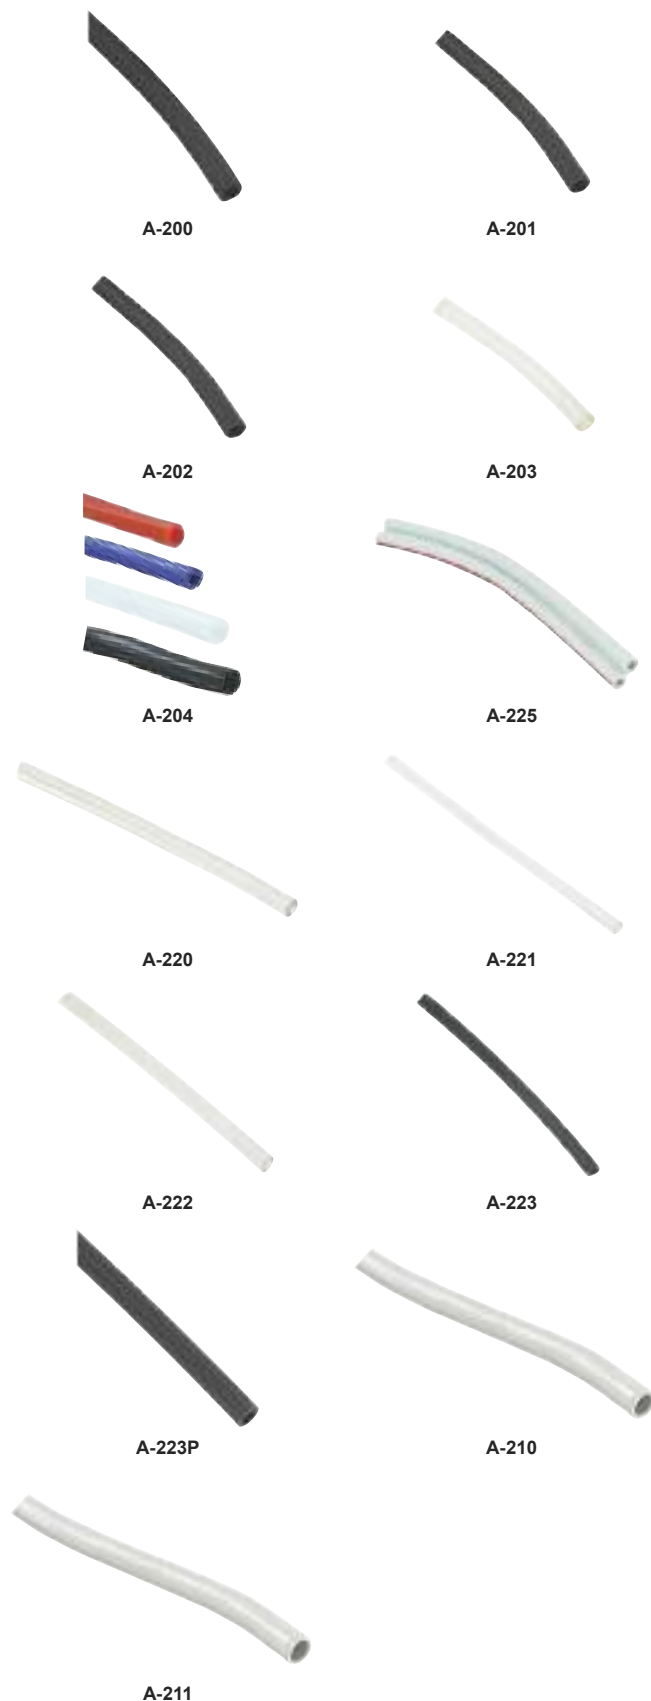

MODELS

A-200, Norprene® tubing is useful in a wide range of temperatures -75 to 275°F (-60 to 135°C) and will not weaken after long term exposure to heat and ozone.

A-200-1, 3/16" ID x 5/16" OD, 13 psi maximum pressure @ 73°F (90 kPa @ 23°C); 50' **\$.45/ft(N)**

A-200-2, 1/4" ID x 3/8" OD, 10 psi maximum pressure @ 73°F (69 kPa @ 23°C); 50' **\$.55/ft(N)**

A-201, Rubber latex tubing has less tendency to kink in storage and occupies less space, thus is best for portable work. 3/16" ID, 9' length **\$.10/00**

A-202, Rubber latex tubing. 3/16" ID, lengths to 50' **\$.29/00ft**

A-203, Clear PVC tubing is easily inspected and is therefore best for test applications where a possibility of fluid entering the tubing exists. 1/8" ID x 1/4" OD, lengths to 100' **\$.13/00ft**

A-225, Flexible double column plastic tubing is used with Mark II manometers and the Wind Speed Indicator. Light gray with red color code stripe. 1/8" ID, lengths to 750' **\$.31/00ft**

A-204, Flexible colored vinyl tubing is quickly distinguishable in applications where more than one line is required aiding installation. 3/16" ID x 5/16" OD, lengths to 500'; 45 psi maximum pressure @ 165°F (310 kPa @ 74°C)

A-204-A, Opaque Red **\$.086/ft(N)**

A-204-B, Opaque Blue **\$.086/ft(N)**

A-204-C, Opaque White **\$.086/ft(N)**

A-204-D, Opaque Black **\$.086/ft(N)**

A-220, Clear flexible vinyl tubing is easily inspected, and is therefore best for test applications where a possibility of fluid entering the tubing exists. 3/16" ID x 5/16" OD, lengths to 500'; 45 psi maximum pressure @ 73°F (310 kPa @ 23°C) **\$.23/00ft**

A-221, Clear flexible vinyl tubing is easily inspected, and is therefore best for test applications where a possibility of fluid entering the tubing exists. 1/8" ID x 3/16" OD, lengths to 500'; 40 psi maximum pressure @ 165°F (276 kPa @ 74°C) **\$.28/00ft**

A-222, Clear flexible vinyl tubing is easily inspected, and is therefore best for test applications where a possibility of fluid entering the tubing exists. .240" ID x .375" OD, lengths to 500'; 35 psi maximum pressure @ 73°F (240 kPa @ 23°C) **\$.28/00ft**

A-223, Black polyethylene tubing offers long life, great stability and resistance to corrosion. 1/8" ID x 1/4" OD, 10' length; 200 psi maximum @ 140°F (1379 kPa @ 60°C) **\$.9.20**

A-223P, Black plenum fire retardent polyethylene tubing meets NFPA standard 90A for installation in air-conditioning and ventilating plenum spaces; also used in building automation systems. Lengths to 500', 100 psig maximum pressure @ 75°F (689 kPa @ 24°C)

A-223P-1, .17" ID x .25" OD **\$.0.99/ft(N)**

A-223P-2, 1/4" ID x 3/8" OD **\$.1.20/ft(N)**

A-210, Aluminum tubing is recommended for permanent installations. 1/4" OD, 5' length, 500 psi maximum pressure @ 200°F (3447 kPa @ 93°C) **\$.6.60**

A-211, Aluminum tubing, 1/4" OD, 50' length, 500 psi maximum pressure @ 200°F (3447 kPa @ 93°C) **\$.167.00**