




FLOAT ACCESS  
ON BOTTOM  
1/2 NPT(F)




FLOAT ACCESS  
ON BOTTOM  
1/2 NPT(M)

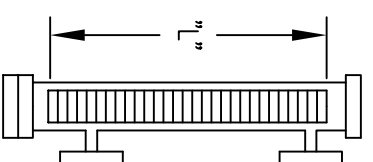


FLOAT ACCESS  
ON BOTTOM  
1/2 NPT 150# FLANGE

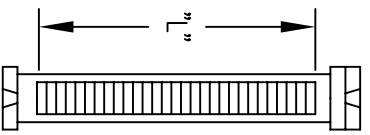

FLOAT ACCESS  
ON TOP  
1/2 NPT(F)




FLOAT ACCESS  
ON TOP  
1/2 NPT(M)

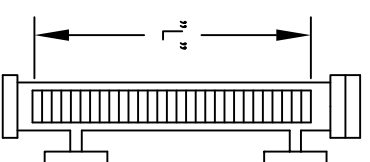


FLOAT ACCESS  
ON TOP  
1/2 NPT 150# FLANGE


INDICATING LENGTH "L"  
000 = LENGTH OF LEVEL INDICATOR. MAX. = 240" (6.1 m);  
MIN. = 6" (15.25 cm)

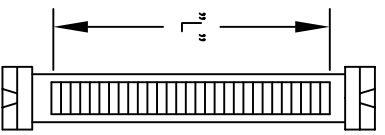

FLOAT ACCESS  
ON TOP AND BOTTOM  
1/2 NPT(F)

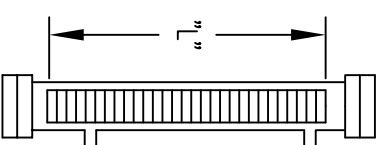

FLOAT ACCESS  
ON TOP AND BOTTOM  
1/2 NPT(M)

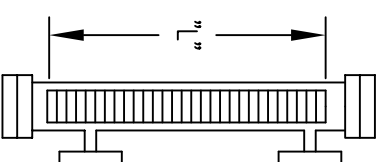

FLOAT ACCESS  
ON TOP AND BOTTOM  
1/2 NPT 150# FLANGE

Ⓢ = CRITICAL DIMENSION  
STANDARD TOLERANCES UNLESS NOTED:  
ALL DECIMAL DIMENSIONS ± .005  
ALL ANGLES ± 1°

NO.		DATE		NAME		MATERIAL	
		DWN BY		MVR SERIES		FINISH	
		CHKD		MINI VIEW RITE LEVEL		Dwyer Instruments, Inc.	
		APPD		INDICATOR		MICHIGAN CITY, INDIANA 46360 U.S.A.	
CHANGES		BY/DATE		ACAD2002		FR. NO.	
				3			

NOTICE: This drawing and the principles and elements of design embodied therein are the exclusive property of DWYER INSTRUMENTS, INC. and are not to be communicated, disclosed, reproduced or used except as previously authorized in writing by such corporation and must not be submitted to outside parties for examination without the written consent of said corporation.