


SERIES GG

GAGE GUARD

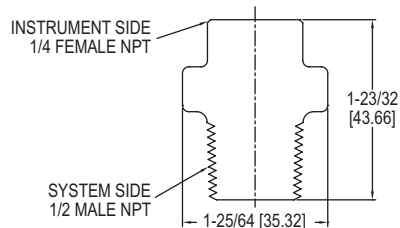

Protecting pressure or vacuum instruments from clogging, corrosion, or damage, the **Series GG Gage Guard** provides a protective barrier between the process fluid and the instrument. The hermetically-sealed uni-body protects from the possibility of leaking. Glass-filled Polypropylene housing is suitable for most inorganic chemicals and temperatures up to 185°F (85°C). A fluid fill station is recommended for proper installation.

MODEL CHART		
Model	Description	Price
GG1	Buna-N diaphragm	\$80.00 ^(B)
GG2	Fluoroelastomer diaphragm	90.50 ^(B)

^(B) Items are subject to Schedule B discounts.

SPECIFICATIONS

Maximum Pressure: Liquids: 160 psi (11 bar) @ 70 to 185°F (21 to 85°C); Gases: 100 psi (6.9 bar) @ 70 to 100°F (21 to 38°C) and 30 psi (2.1 bar) @ 100 to 185°F (38 to 85°C).

Accuracy: ±4%.

Maximum Temperature: 185°F (85°C).

Wetted Parts: Glass-filled polypropylene housing, Buna-N or fluoroelastomer diaphragm.

Dimensions: 1/4" female NPT instrument side; 1/2" male NPT system side; 1-3/8" (35 mm) diameter.