

SOLENOID VALVE ENCLOSURES


For the Series RSV Remote Solenoid Valves




SVE06WP61



SVE06WP61

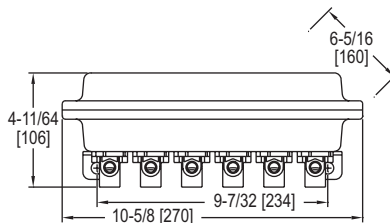

SVE06

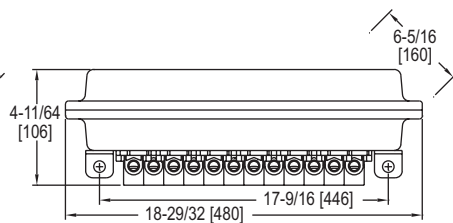

SVE12

The **Series SVE Solenoid Valve Enclosures** are multi-valve enclosures for the RSV pilot valve. The SVE offers a convenient weatherproof enclosure package with all solenoids pre-wired to a terminal block. Enclosures are available in 6 or 12 valve size with choice of pilot valve voltage.

FEATURES/BENEFITS

- Weatherproof enclosure
- Can order pre-wired to terminal block
- Available in 6 or 12 valve size

APPLICATIONS

- For use with RSV only, compatible gases

MODEL CHART

Model	Quantity of Solenoid	Enclosure Type	Voltage	Price
SVE06WP61	6	Weatherproof	110 VAC	\$424.00 ^(B)
SVE06WP62	6	Weatherproof	220 VAC	424.00 ^(B)
SVE06WP63	6	Weatherproof	24 VDC	424.00 ^(B)
SVE12WP121	12	Weatherproof	110 VAC	657.00 ^(B)
SVE12WP122	12	Weatherproof	220 VAC	657.00 ^(B)
SVE12WP123	12	Weatherproof	24 VDC	657.00 ^(B)

^(B) Items are subject to Schedule B discounts.

SPECIFICATIONS

- Service:** (For RSV) Compatible gases, filtered and oil free.
- Wetted Materials:** (For RSV) Body: Aluminum; Core and spring: 304 SS; Seals: NBR.
- Pressure Limits:** (For RSV) Min of 4.4 psi (0.3 bar), max of 124.7 psi (8.6 bar).
- Temperature Limits:** Ambient: -4 to 122°F (-20 to 50°C); Operating: -4 to 185°F (-20 to 85°C).
- Power Requirement:** (For RSV) 110 VAC, 220 VAC, or 24 VDC.
- Power Consumption:** (For RSV) 12 W, inrush: 17 VA, holding: 14.5 VA.
- Enclosure Rating:** NEMA 4X (IP66).
- Enclosure Material:** Anodized aluminum with NBR gasket.
- Electrical Connection:** All RSV are pre-wired to a terminal strip.
- Process Connection:** (For RSV) 1/8" female NPT.
- Conduit Connection:** 3/4" female NPT.
- Mounting Orientation:** Any position.
- Pneumatic Tube Length:** Max of 9.8' (3 m).